



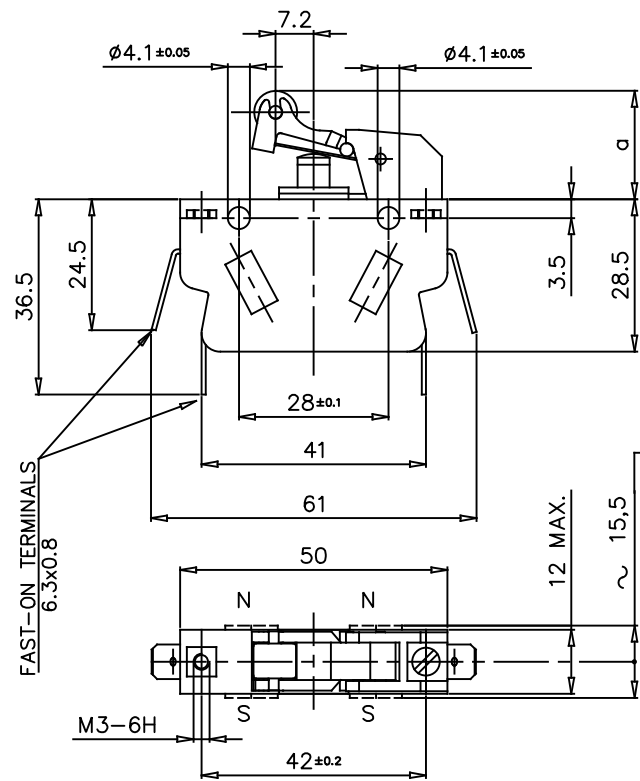


Only for Cod. SJ11-RNSQOBWC

Galvanically isolated contact bridges



MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

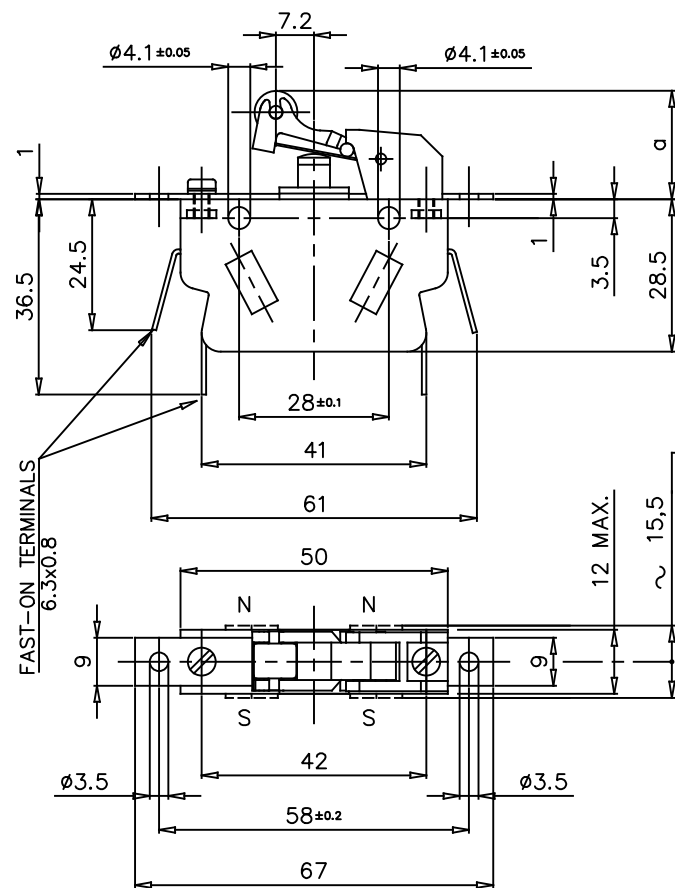

Only for Cod. SJ11-RDSQOBWC

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ11-RNSQOUW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ11-RNGQOUW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ11-RNSQOBW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ11-RDSQOUW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ11-RDGQOUW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ11-RDSQOBW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

				MATERIALE	TRATTAMENTO
DATA	DISEGNATO	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA
15-05-00	15-05-00	15-05-00	15-05-00	MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	1:1
FIRMA	ABBIATI	BOSSONI	GALLUCI		REVISIONE



DESCRIZIONE
SNAP-ACTION MICROSWITCH (1 N.O. + 1 N.C.)
WITH OPERATION LEVER AND FASTON TERMINALS 90°

COD. VEDI TABELLA	F. 1
DIS. IP103460	D. 1

SI SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA

##0## SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE
1 C.M.2653 31-05-00 ABBIATI	2 M.D. 0021 24/10/06 GM	3 M.D. 0067 19/04/22 GM	4 M.D. 008 14/06/22 GM	5 C.M. 0001 06/09/24 MU

3	2	1	Rifer.
			Funz.
			Accop.
			Cliente