

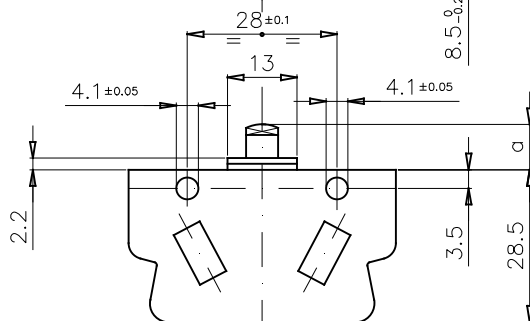




BODY



COVER

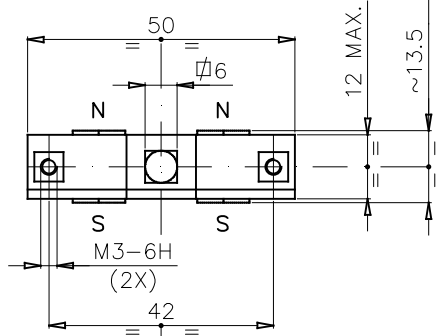

Only for Cod. SJ11-PNSNOBWN



MAX. OPERATING FORCE	N
RELEASE FORCE	1
REST POSITION	a mm
TRIPPING POSITION	6,6±0,35
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	5,65

Galvanically isolated contact bridges

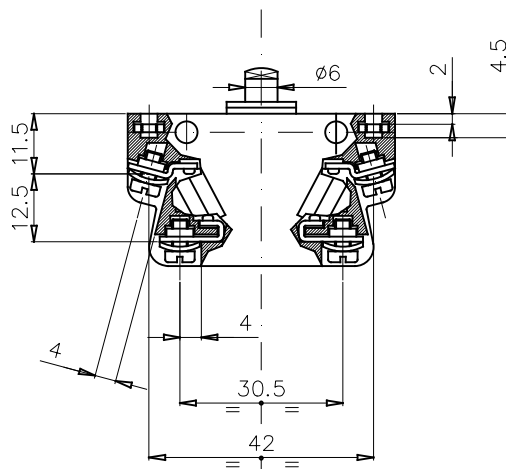

BODY

COVER

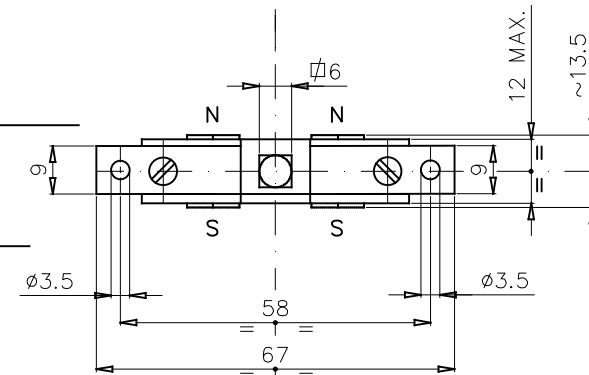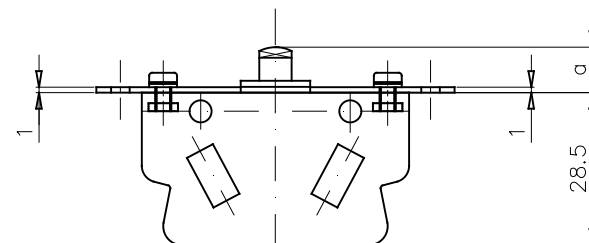

Only for Cod. SJ11-PDSNOBWN

EXECUTIONS WITH FIXING DISTANCE 28 mm

CODE	FEATURE
SJ11-PNSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ11-PNGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ11-PNSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

EXECUTIONS WITH FIXING DISTANCE 58 mm

CODE	FEATURE
SJ11-PDSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ11-PDGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ11-PDSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI



SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA

##0##

SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE	MODIFICHE
1	C.M. 0001	18/09/24	MU				

3	2	1
Rifer.	Funz.	Accop.
Cilente		



DESCRIZIONE

SNAP-ACTION MICROSWITCH (1NO + 1 NC)
LATAMID - NERO/BLACK

COD. VEDI TABELLA

DIS. IP130190

F. 1
di 1
FORMATO A3