




Galvanically isolated contact bridges

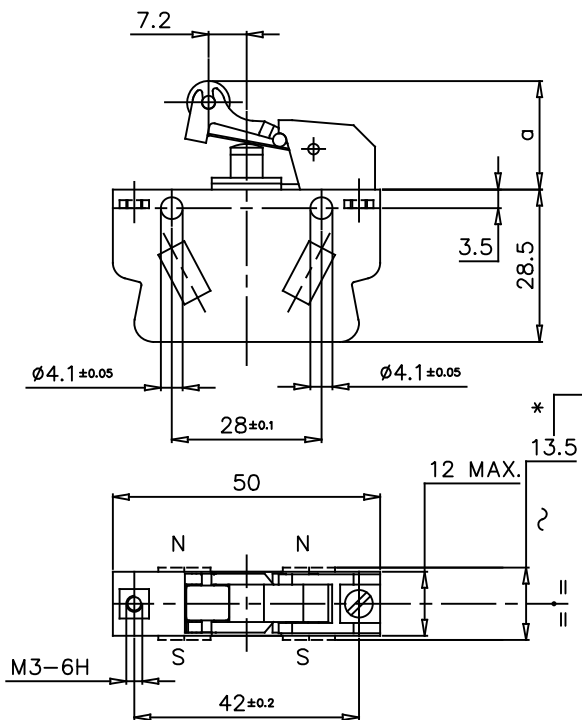

MAX. OPERATING FORCE	N
RELEASE FORCE	0,64
REST POSITION	a mm
TRIPPING POSITION	20,1±0,25
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	16,1±0,25
	18,0±0,25
	a mm
	14,1

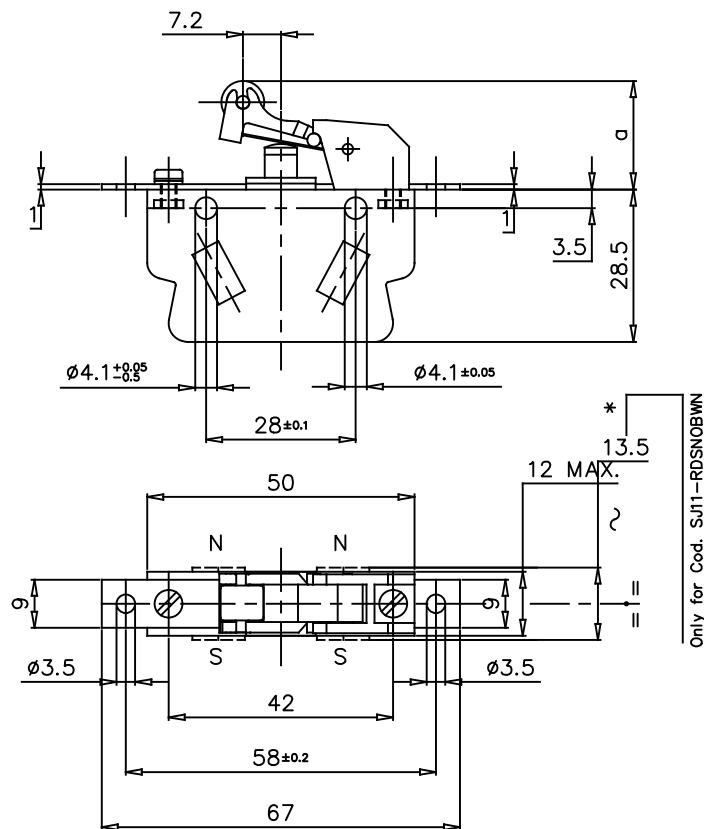

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ11-RNSNOUW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ11-RNGNOUW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ11-RNSNOBW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ11-RDSNOUW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ11-RDGNOUW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ11-RDSNOBW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA
 ##○##
 SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE	3	2	1	Rifer.
1] C.M. 0001				Funz.
18/09/24				Accop.
MU				Cliente

				MATERIALE	TRATTAMENTO
DATA	07/01/08	APPROVATO	07/01/08	VISTO C.C.	07/01/08
FIRMA	GM	VELLUTINI	VELLUTINI	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1
				MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	REVISIONE
					1 2 3 4 5 6 7
					COD. VEDI TABELLA
					DIS.
					IP131780
					F. 1 di 1



SNAP-ACTION MICROSWITCH (1 N.O. + 1 N.C.)
LATAMID WITH OPERATION LEVER

A3
 F. 1 di 1
 ACAD