



Galvanically isolated contact bridges




MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

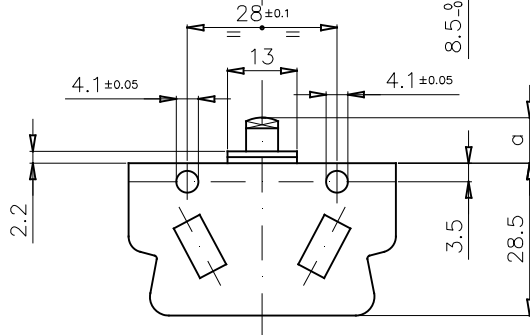


BODY

COVER


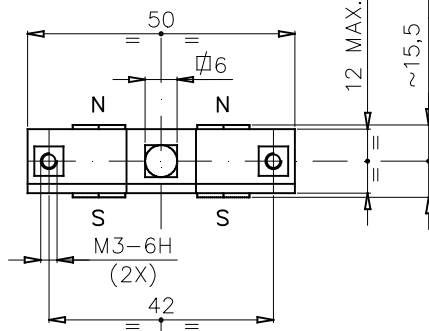


Only for Cod. SJ11-PNSNOBWC

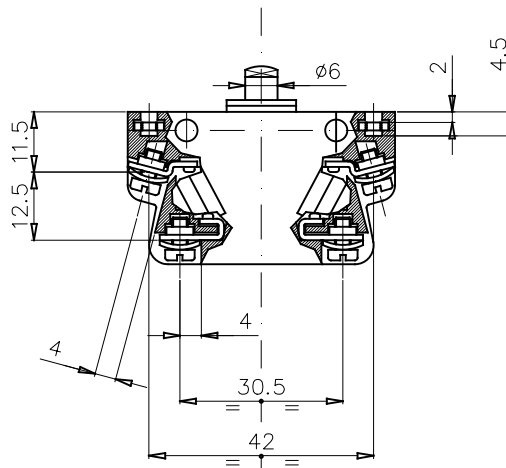

BODY

COVER

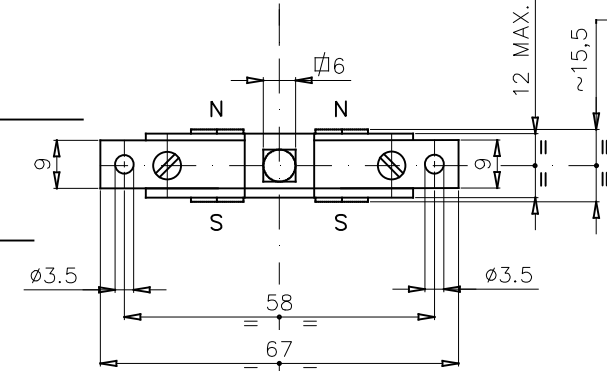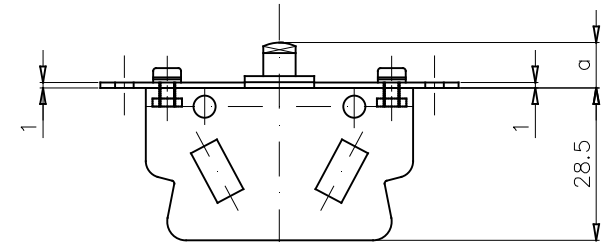

Only for Cod. SJ11-PDSNOBWC

EXECUTIONS WITH FIXING DISTANCE 28 mm

CODE	FEATURE
SJ11-PNSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ11-PNGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ11-PNSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL

CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm

CODE	FEATURE
SJ11-PDSNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ11-PDGNOUW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ11-PDSNOBW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

MATERIALE

VEDI TABELLA

TRATTAMENTO

DATA	DISegnato	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA	SOSTITUISCE	PESO
03-11-97	03-11-97	14-04-98		MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	1:1		
FIRMA	ABBATI	VELLUTINI	GALLUCCI		REVISIONE		



DESCRIZIONE

SNAP-ACTION MICROSWITCH
(1NO + 1 NC)

COD. VEDI TABELLA

DIS. IP939500

FORMATO A3
F. 1 di 1