




Galvanically isolated contact bridges

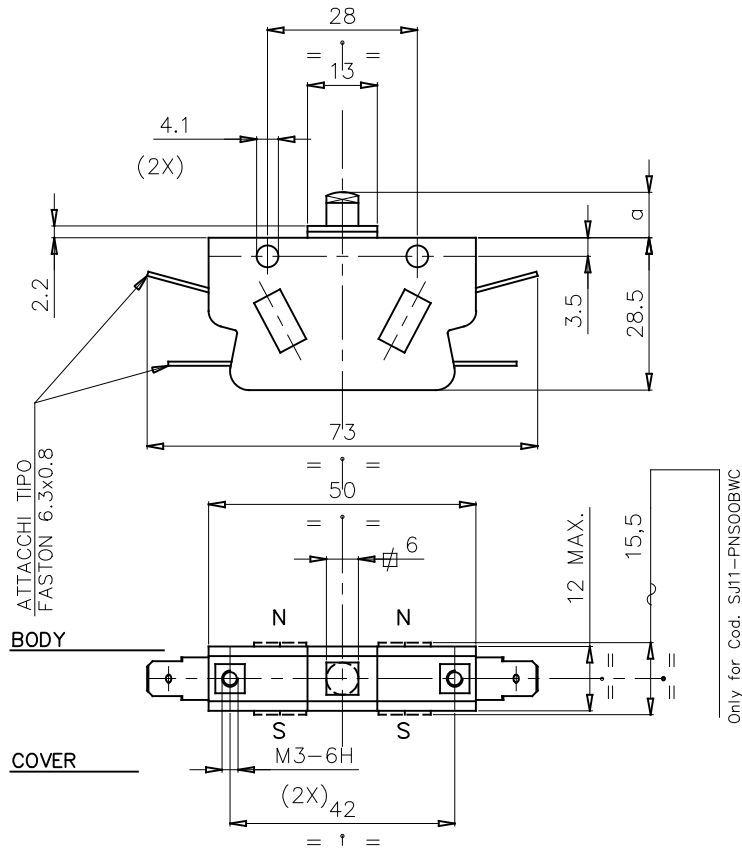

MAX. OPERATING FORCE	N
RELEASE FORCE	2,4±0,3
REST POSITION	N
TRIPPING POSITION	1
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	8,8±0,25
	a mm
	6,6±0,35
	a mm
	7,8±0,35
	a mm
	5,65

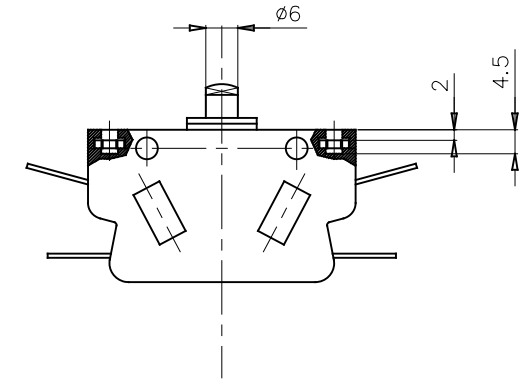

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

ESECUZIONI - EXECUTIONS	
CODICE - CODE	CONFIGURAZIONE - FEATURE
SJ11-PNS00UW*	With solid silver contacts (standard)
SJ11-PNG00UW*	With gold plated contacts
SJ11-PNS00BW*	With solid silver contacts and blowing magnets

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

				MATERIALE VEDI TABELLA			TRATTAMENTO		
				TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1			SCALA 1 : 1		
				MOLTO GROSSOLANA GROSSOLANA MEDIA FINE			SOSTITUISCE		
FIRMA				ABBATI VELLUTINI GALLUCCI			REVISIONE		
DATA				14-04-98 14-04-98 14-04-98			COD. VEDI TABELLA		
DESCRIZIONE				SNAP-ACTION MICROSWITCH (1 N.O. + 1 N.C.) WITH FASTON TERMINALS			F. DI		
SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA							IP950900		
SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO									
MODIFICHE				3 2 1 Rifer.					
1 C.M. 2380 07/05/99				2 M.D. 0021 24/10/06			3 M.D. 0031 25/01/08		
2 M.D. 0021 24/10/06				3 M.D. 0031 25/01/08			4 M.D. 008 14/06/22		
3 M.D. 0031 25/01/08				4 M.D. 008 14/06/22			5 C.M. 0001 18/09/24		
4 M.D. 008 14/06/22				5 C.M. 0001 18/09/24					
5 C.M. 0001 18/09/24									

