

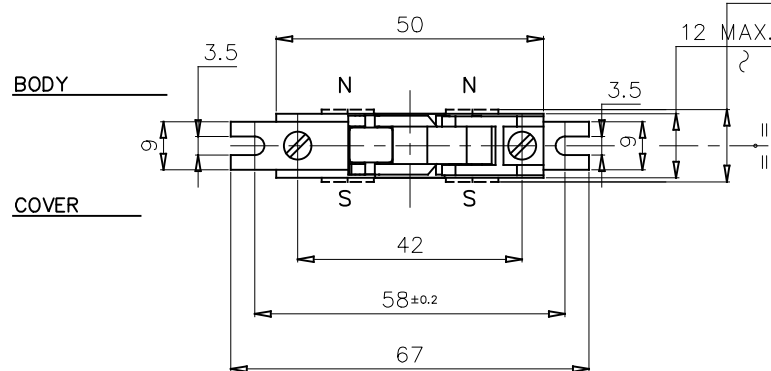


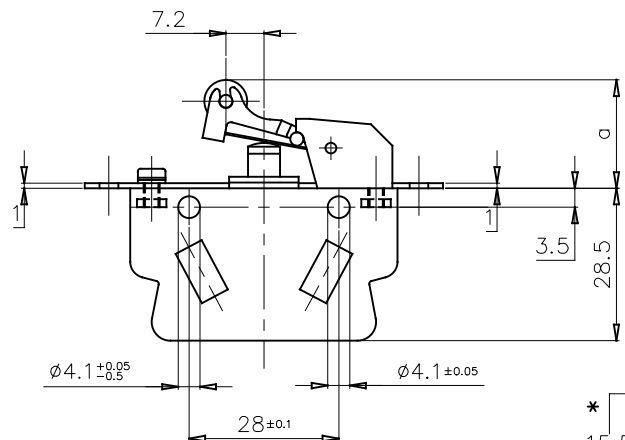

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

* Only for Cod. SJ11-RASNOBWC

Galvanically isolated contact bridges



MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	20,1±0,25
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	18,0±0,25
	14,1

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ11-RASNOUW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ11-RAGNOUW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ11-RASNOBW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

				MATERIALE				TRATTAMENTO							
	DISEGNATO	APPROVATO	VISTO C.C.	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1 MOLTO GROSSOLANA GROSSOLANA MEDIA FINE				SCALA		SOSTITUISCE	A3				
DATA	06/10/22	06/10/22	06/10/22					1:1							
FIRMA	GM	RIZZI	RIZZI					REVISIONE	1	2	3	4	5	6	7
 ISOLEX Milano Italy				DESCRIZIONE SNAP-ACTION MICROSWITCH (1 N.O. + 1 N.C.) WITH OPERATION LEVER + SLOTTED MOUNTING PLATE				COD. VEDI TABELLA				F. 1 di 1			
								IP951500A							



SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA



SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE
1] C.M. 0001
19/09/24
MU

3	2	1	Rifer.
			Funz.
			Accop.
			Cilente