


MODIFICHE

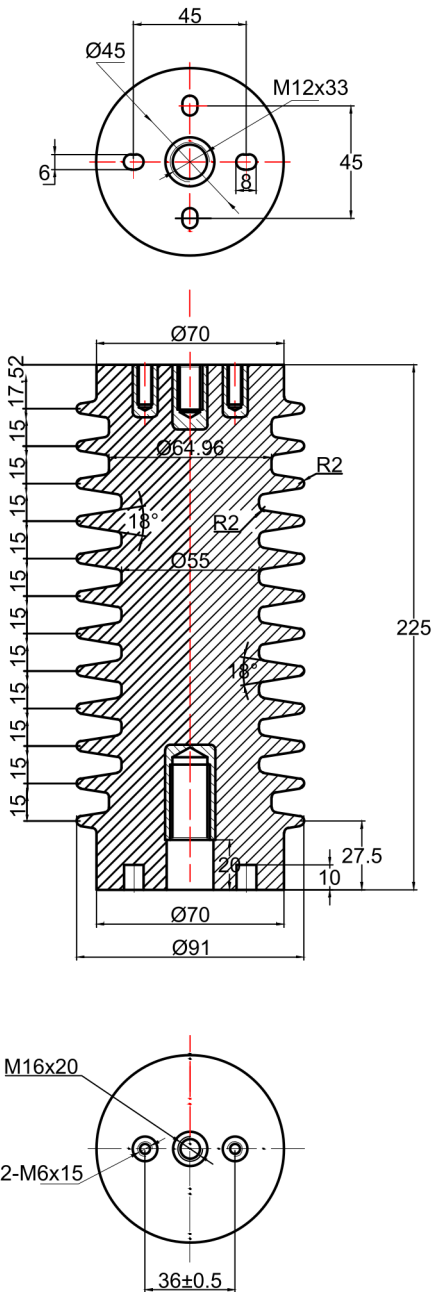

- Rated values according to IEC 60273 - Tests according to IEC 60660
- 1 - Rated Highest voltage for equipment (Um) 24kV
 - 2 - Rated Power Frequency Withstand Voltage, dry (50 Hz, 1 min) 50kV
 - 3 - Rated Lightning impulse withstand (1.2/50 us) 125kV
 - 4 - Creepage distance 440mm
 - 5 - Flexion resistance 10kN
 - 6 - Flammability rating, UL 94 V0, V1
 - 7 - Ambient temperatures -40° C to +90° C

DISEGNO DI PROPRIETÀ DELLA ISOLEX CHE SI RISERVA TUTTI I DIRITTI DI LEGGE				MATERIALE Epoxy Resin;Brass/Steel insert				TRATTAMENTO --								
	DISEGNATO	APPROVATO	CONTROLLATO	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI – ISO 2768 MOLTO GROSSOLANA GROSSOLANA MEDIA FINE ☐ ☐ ☒ ☐				SCALA 1:1				SOSTITUISCE				
DATA								REVISIONE		1	2	3	4	5	6	7
FIRMA																
				DESCRIZIONE J0-10-125 (225) Resin post insulator								COD.				F. 1 DI 1
												DIS.				
												ID10317				