



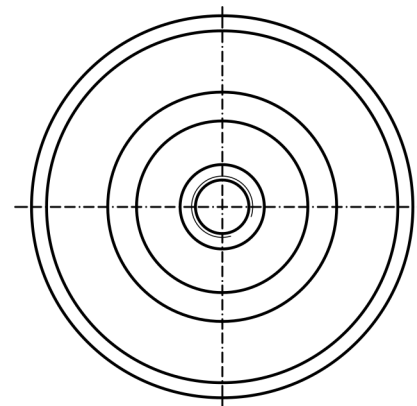

0.8

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE	
One-shot forming technology, with no bubbles or scars on the surface	
PF	42 kV/1min
Creepage distance	>=240mm
Bending strenght	>=10kN
Partial discharge	=<5pC
General Tolerances to GB/T	1804

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana	
Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX	
Cliente Customer	Scala Scale 1:1
Conferma Acknowledg.	Codice Code ZJ105-12
N. Ordine P. Order	Revisione Revision - A4
Descrizione - Description	
Resin Epoxy Post Insulator 12kV: RE12	
Foglio Sheet 1 di 1	
Disegno N. - Dwg. No. ID10356	

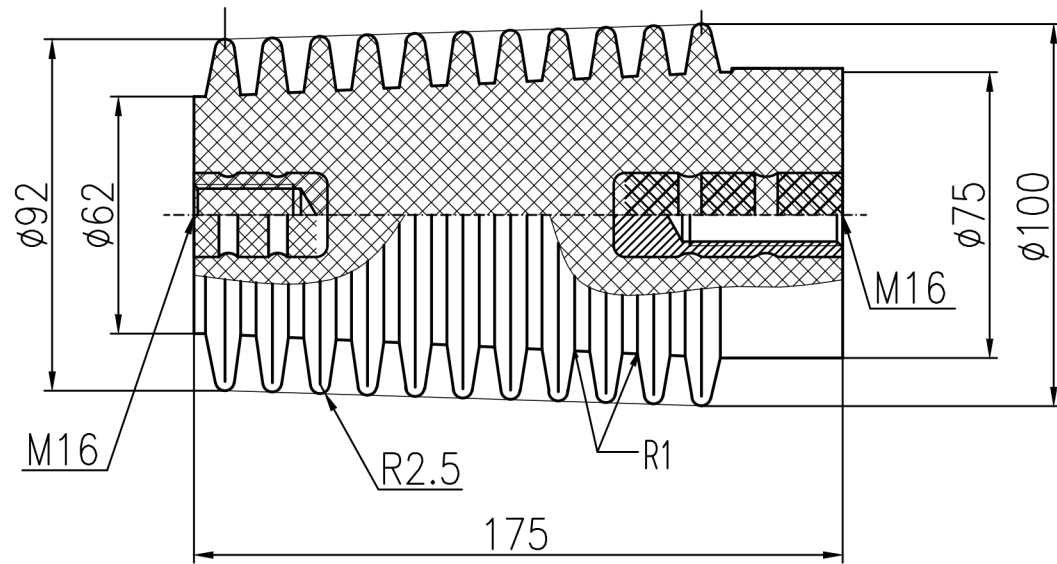