
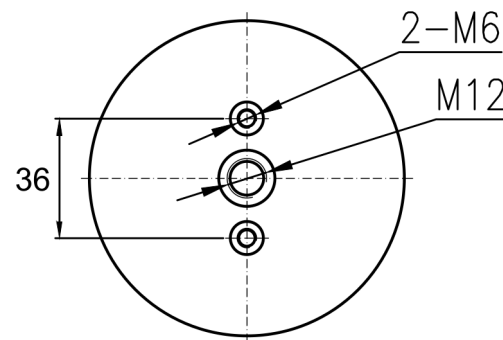
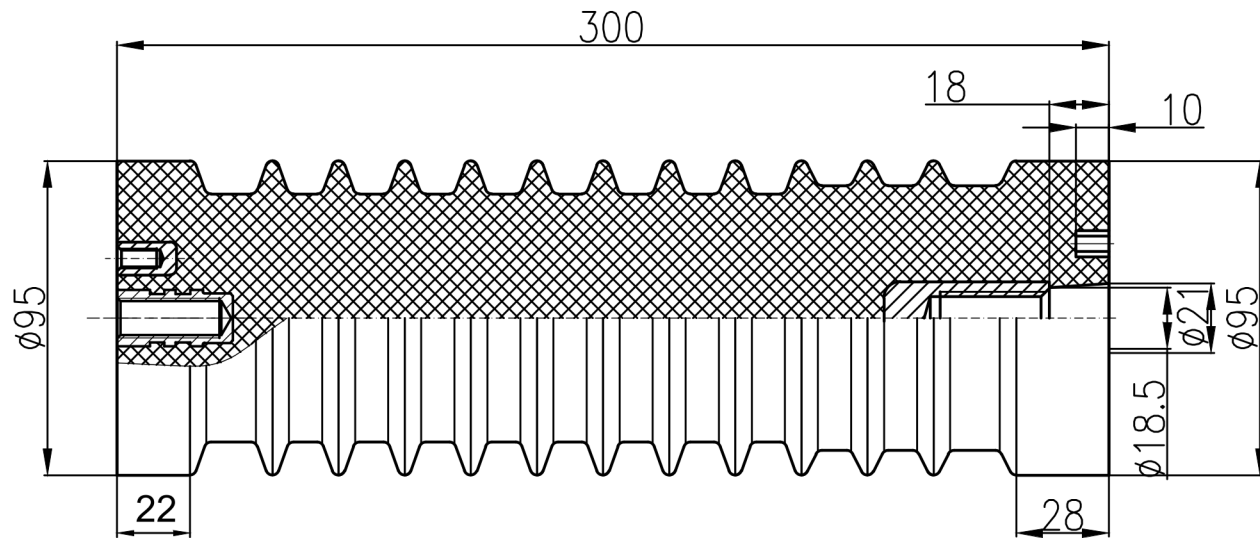


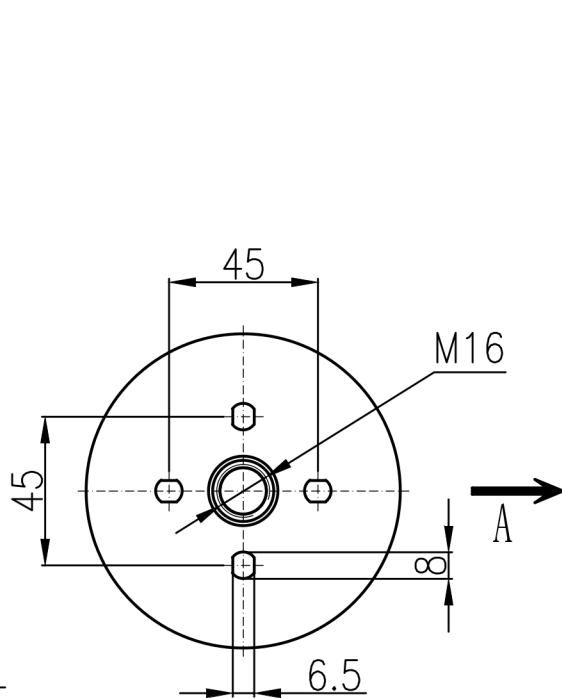

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE

Operating voltage	kV	36
Partial discharge	kV	=<3pC
No. of Ribs	kV	11
Weight	kg	3.2
Creepage distance	mm	434
Lighting impulse withstand voltage	kV	170
Power frequency withstand voltage	kV	70
Cantilever strenght	kN	>7.5
Testing and tolerance	IEC60660:1999 JB/T 10305-2001	
Temperature withstand	-25°C up to +75°C	
Color	Red & Brown	

No.	H	L	W
1	H=300	L=22	W=28
2	H=320	L=32	W=38
3	H=325	L=32	W=43

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code ZJ203-36
Conferma Acknowledg.		File	Revisione Revision - A4
ISOLEX Milano Italy		Descrizione - Description Resin EPoxy Post Insulator	
		Foglio Sheet 1 di 1	
		Disegno N. - Dwg. No. ID10366	