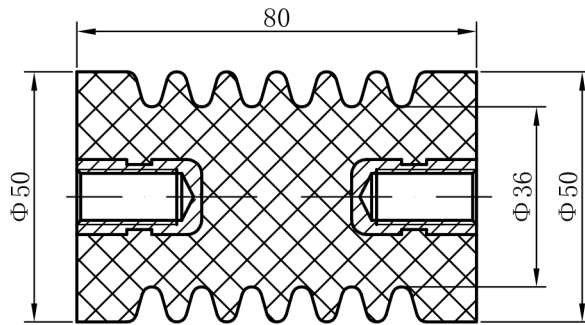
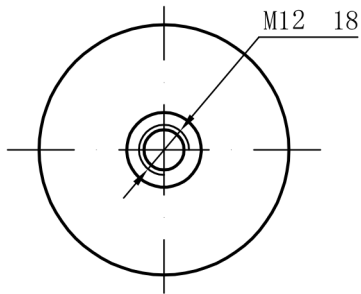


TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE

Dimensional tolerances of unspecified features shall conform to GB/T14486-MT5

Manufactured by APG process using epoxy resin under pressure

Surface must be smooth, free of burrs, cracks, and internal defects

Power frequency withstand voltage: 32kV for 1 minute, without flashover or breakdown

Partial discharge: $\leq 3\text{pC}$ under 7.9kV

Creepage distance: 133 mm

Color: Red

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana	
Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX	
Cliente Customer	Scala Scale 1:1
Conferma Acknowledg.	Codice Code ZJ303
N. Ordine P. Order	File
Descrizione - Description Epoxy Resin Insulator	
Foglio Sheet 1 di 1	
Disegno N. - Dwg. No. ID10373	