
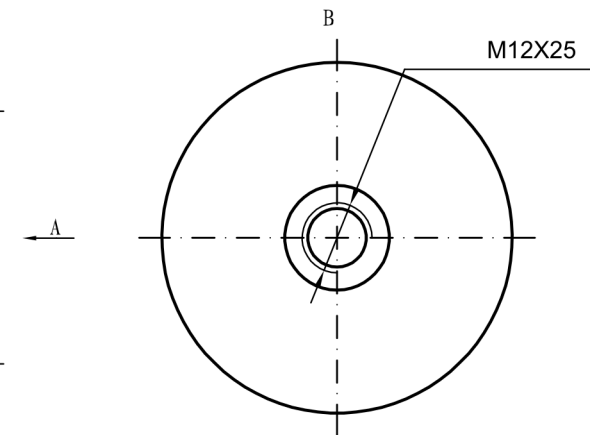
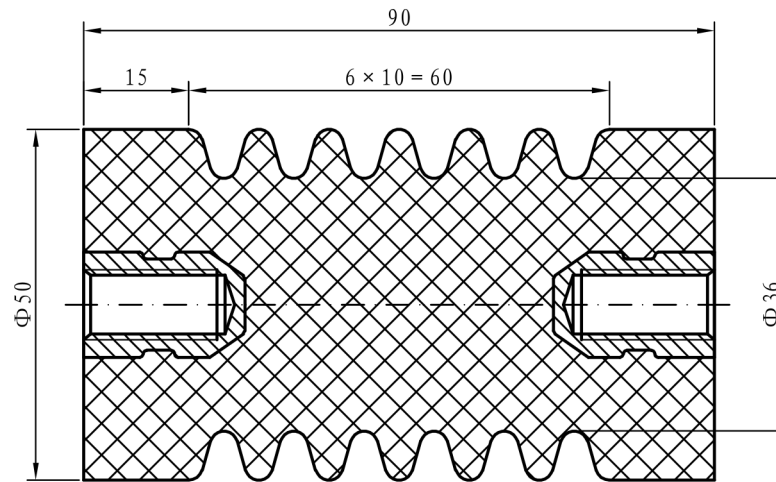


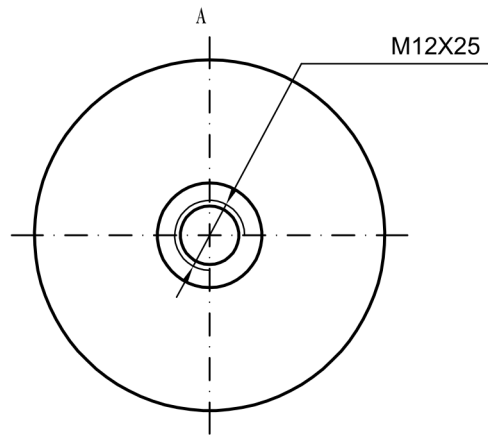

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE

No. of Ribs 5

Weight	kg	0,45
Creepage distance	mm	160
Lighting impulse withstand voltage	kV	60
Power frequency withstand voltage	kV	28
Tests corresponding	IEC60660 (VDE 0441/part3)	
Designation corresponding	DIN48136	
Designation corresponding	IEC60273	
Color	RAL 8016	
Failing load and bending	kN	5

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code ZJ303-7.2
Conferma Acknowledg.		File	Revisione Revision - A4
ISOLEX Milano Italy		Descrizione - Description Post insulator	
		Foglio Sheet 1 di 1	
		Disegno N. - Dwg. No. 10393	