
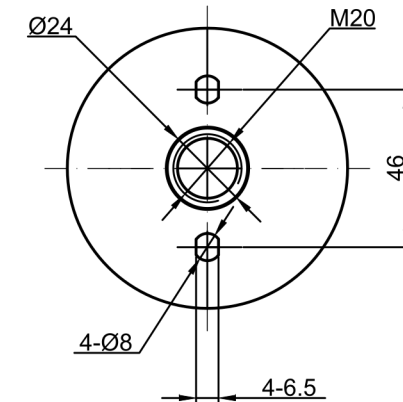
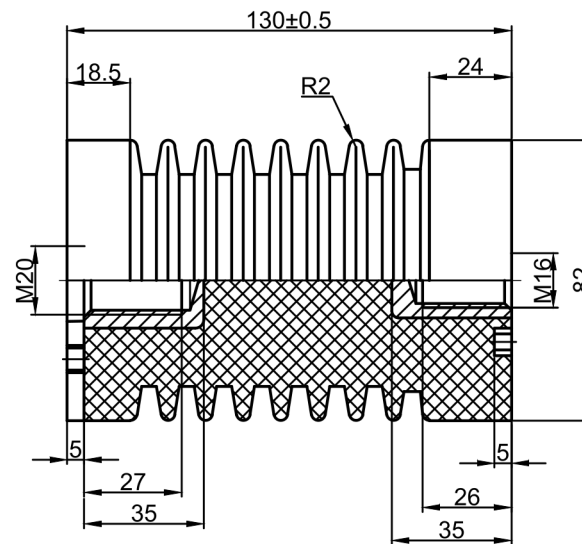


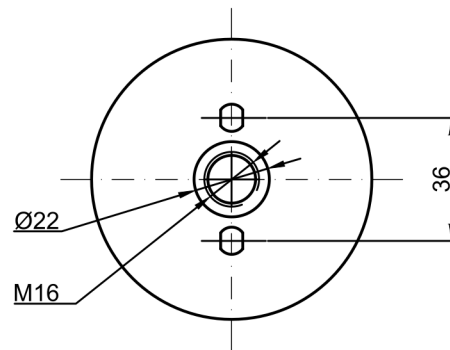

SR NO.	DETAILS	SPECIFICATION
1	Operating Voltage	12kV
2	Partial Discharge	<5pC for V>13.2kV
3	No. of Ribs	7 Nos.
4	Weight	0.85kg
5	Creepage distance	240mm
6	Lighting Impulse withstand voltage	95kV
7	Power-frequency withstand voltage	42kV/1min
8	Cantilever Strenght	>10kN
9	Testing and tolerance	IEC 60660:1999 JB/T 10305-2001
10	Temperature withstand	-25°C up to +110°C
11	Color	Red
11	Torque M16	60Nm(max.)

Support insulator made in epoxy for indoor use – red color
Flexion: 10000N
Height: 130mm – Ø82mm – creepage distance= 240mm
Thread on top: M16 + 2xM8 (axe holes 36mm)
Thread on base: M20 + 2xM8 (axe holes 46mm)
Material: cast epoxy resin

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medio ☐ Grossolana ☐ Molto grossolana Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse		
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX		
Cliente Customer	Scala Scale 1:1	Codice Code ZJ101-12-11
Conferma Acknowledg.	N. Ordine P. Order	File
	Descrizione - Description Epoxy resin insulator	Revisione Revision - A4
		Foglio Sheet 1 di 1 Disegno N. - Dwg. No. ID10410