


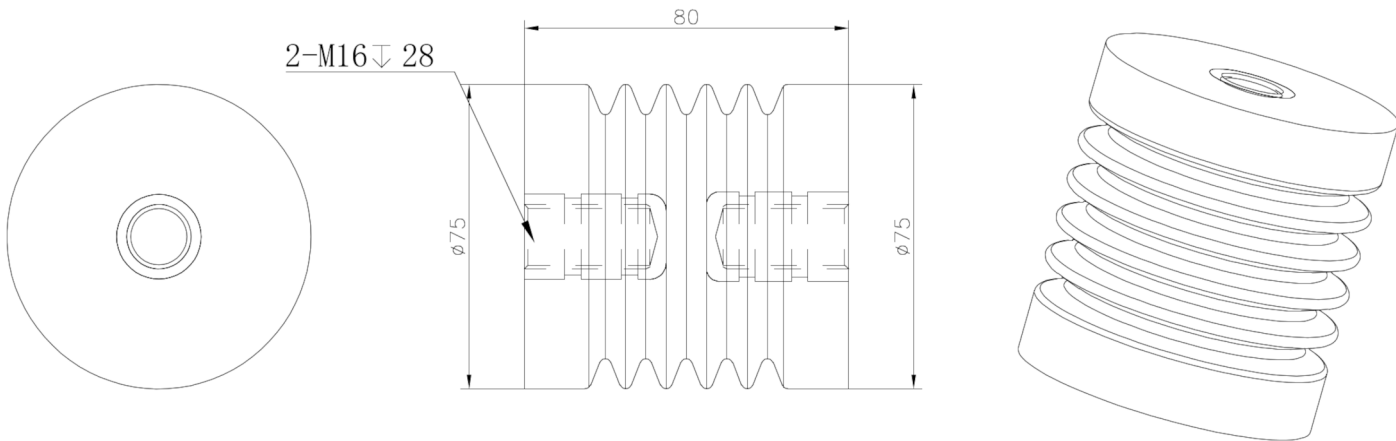

TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
AC Working Voltage	kV	3.6
Dry Frequency Voltage	kV	20
BIL	kV	40
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Tensile	kN	19,6
Bending	kN	3.5
Torque	Nm	--
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Height	mm	80
Dmin	mm	75
Dmax	mm	75
Creepage	mm	100
Material	Epoxy Resin	
Applicable standard / Standard applicabili IEC 60273 IEC 60660 / 60660-1		

Undimensioned Tolerance		Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's:		Media Medium		Grossolana Coarse		Molto grossolana Very coarse	
> 3 - 6	± 0.3	Cliente Customer		Scala Scale 1:1		Codice Code		Revisione Revision	
> 6 - 30	± 0.5	Conferma Acknowledg.		N. Ordine P. Order		File		Revision 1	
> 30 - 120	± 0.8	ISOLEX		Descrizione - Description		Foglio Sheet 1 di of 1		Disegno N. - Dwg. No.	
> 120 - 400	± 1.2	ISOLEX		Epoxy Resin Post Insulator H=80 3.6 kV				ID10459	
> 400 - 1000	± 2.0	ISOLEX							