
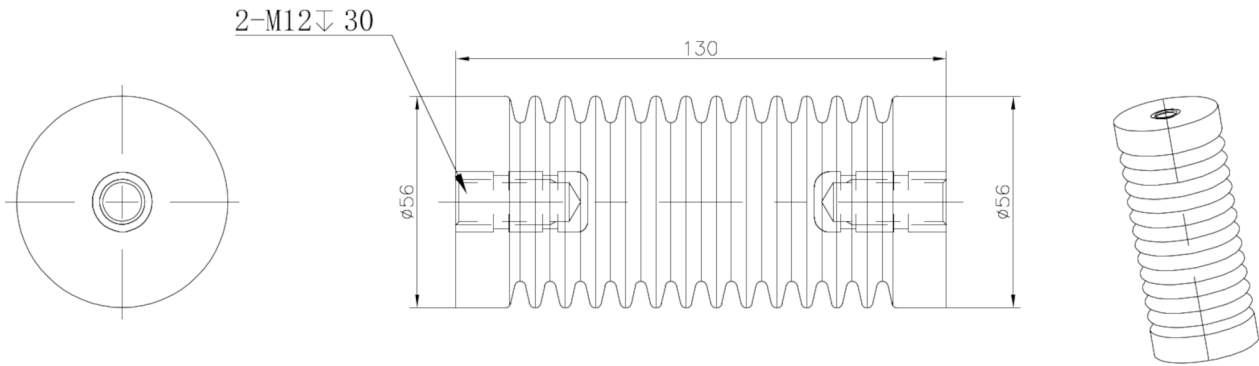


MODIFICHE	
0	I.C.0001 25-11-25 AT



TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
AC Working Voltage	kV	12
Dry Frequency Voltage	kV	38
BIL	kV	75
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Tensile	kN	20
Bending	kN	4
Torque	Nm	80
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Height	mm	130
Dmin	mm	56
Dmax	mm	56
Creepage	mm	171
Material	Epoxy Resin	
Applicable standard / Standard applicabili IEC 60273 IEC 60660 / 60660-1		

3	Material Insert	Brass		
2	Insert	M12		
ITEM No.	DESCRIPTION	MATERIALS QTY REMARK		
EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana				
UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse				
tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX				
		Scala Scale 1:1	Codice Code	
		File		
tion		Revisione Revision 1 A4		
		Foglio Sheet 1 di 1		
		Disegno N. - Dwg. No.		
Resin Post Insulator H=130 12 kV		ID10461		

Undimensioned Tolerance	
> 3 - 6	± 0.3
> 6 - 30	± 0.5
> 30 - 120	± 0.8
> 120 - 400	± 1.2
> 400 - 1000	± 2.0



Epoxy Resin Post Insulator H=130 12 kV