
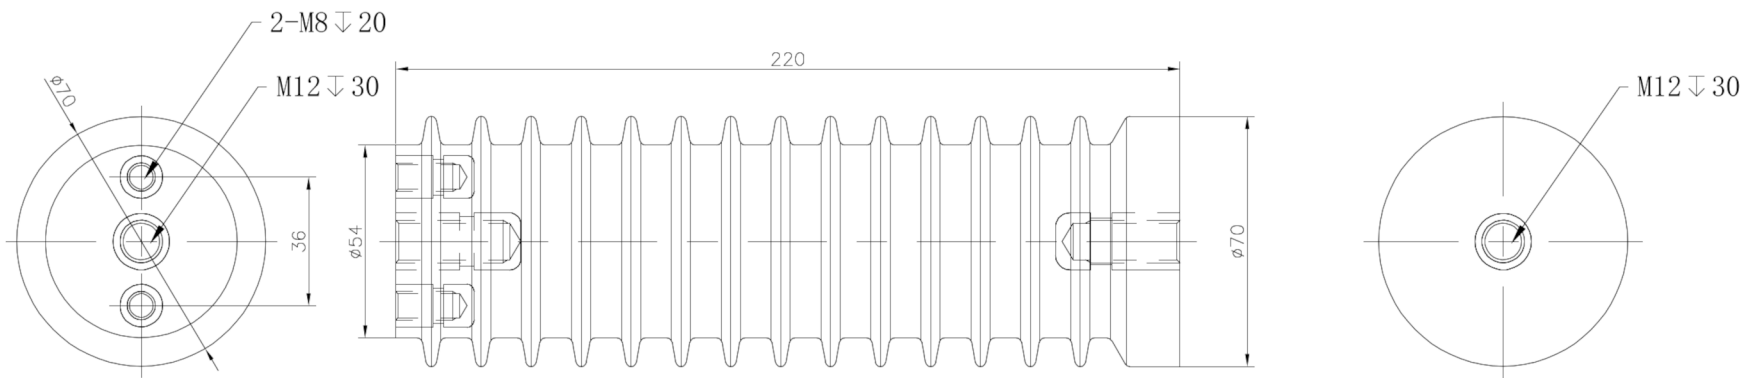




MODIFICHE	
0	I.C.0001 25-11-25 AT

	TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
4	ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
	AC Working Voltage	kV	24
	Dry Frequency Voltage	kV	50
	BIL	kV	125
	MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
5	Tensile	kN	10
	Bending	kN	4
	Torque	Nm	5
	PHYSICAL PROPERTIES/PROPRIETA FISICHE		
	Height	mm	220
	Dmin	mm	70
	Dmax	mm	70
	Creepage	mm	305
	Material	Epoxy Resin	
	Applicable standard / Standard applicabili IEC 60273 IEC 60660 / 60660-1		

3	Material Insert	Nylon		
2	Insert	1(M12) 3(M12 + M8*2)		
ITEM No.	DESCRIPTION	MATERIALS	QTY	REMARK
EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana				
UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse				
a tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX				
	Scala Scale	1:1	Codice Revision	
	File			
Revisione Revision			1	A4
			Foglio Sheet	1 di 1
Disegno N. - Dwg. No.			ID10465	
Resin Post Insulator H=220 24 kV				

Undimensioned Tolerance		ISOLEX Milano Italy
> 3 - 6	± 0.3	
> 6 - 30	± 0.5	
> 30 - 120	± 0.8	
> 120 - 400	± 1.2	
> 400 - 1000	± 2.0	