
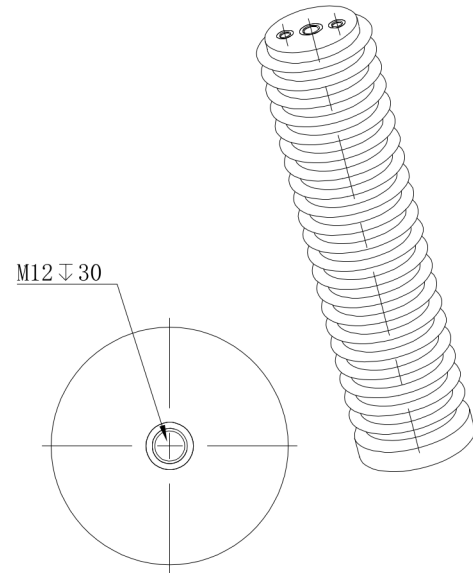


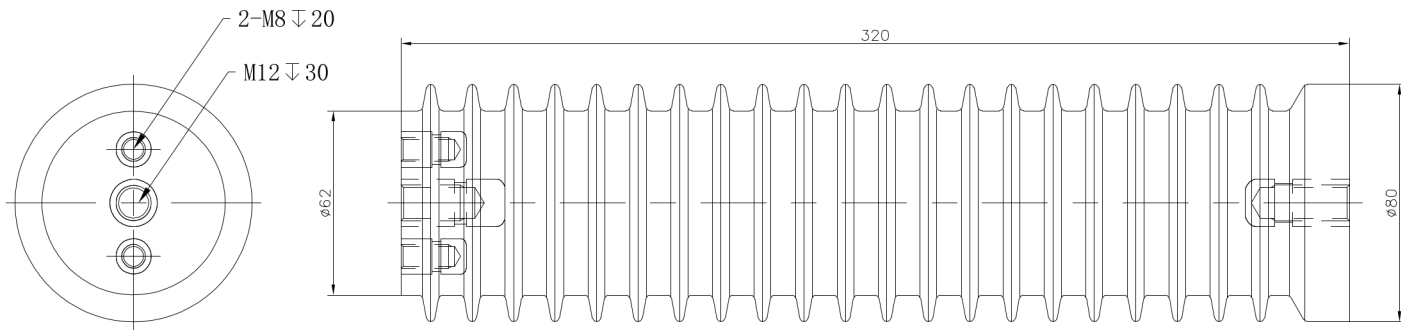

TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
AC Working Voltage	kV	36
Dry Frequency Voltage	kV	70
BIL	kV	170
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Tensile	kN	10
Bending	kN	4
Torque	Nm	5
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Height	mm	320
Dmin	mm	80
Dmax	mm	80
Creepage	mm	457
Material	Epoxy Resin	
Applicable standard / Standard applicabili IEC 60273 IEC 60660 / 60660-1		

Undimensioned Tolerance		Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's:		Media Medium		Grossolana Coarse		Molto grossolana Very coarse	
> 3 - 6	± 0.3	Cliente Customer		Scala Scale 1:1		Codice Code		Revisione Revision 1	
> 6 - 30	± 0.5	Conferma Acknowledg.		File		Foglio Sheet 1		di of 1	
> 30 - 120	± 0.8	N. Ordine P. Order		Descrizione - Description		Disegno N. - Dwg. No.		ID10466	
> 120 - 400	± 1.2	ISOLEX Milano Italy		Epoxy Resin Post Insulator H=320 36 kV					
> 400 - 1000	± 2.0								

3	Material Insert	Nylon
2	Insert	1(M12) 3(M12 + M8*2)
ITEM No.	DESCRIPTION	MATERIALS QTY REMARK