


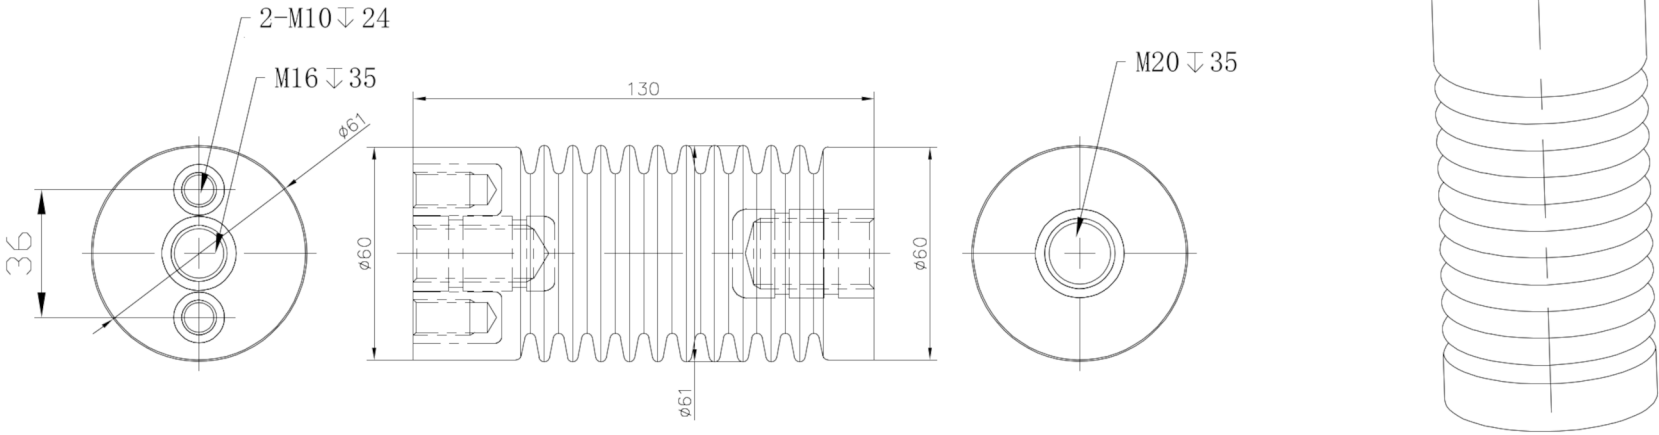

TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
AC Working Voltage	kV	12
Dry Frequency Voltage	kV	25
BIL	kV	75
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Tensile	kN	10
Bending	kN	4
Torque	Nm	80
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Height	mm	130
Dmin	mm	60
Dmax	mm	61
Creepage	mm	240
Material	Epoxy Resin	
Applicable standard / Standard applicabili IEC 60273 IEC 60660 / 60660-1		

Undimensioned Tolerance		Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's:		Media Medium		Grossolana Coarse		Molto grossolana Very coarse	
> 3 - 6	± 0.3	Cliente Customer		Scala Scale 1:1		Codice Code		Revisione Revision 1	
> 6 - 30	± 0.5	Conferma Acknowledg.		N. Ordine P. Order		File		Revisione Revision 1	
> 30 - 120	± 0.8	ISOLEX		Descrizione - Description		Foglio Sheet 1		di of 1	
> 120 - 400	± 1.2	ISOLEX		Epoxy Resin Post Insulator H=130 12 kV		Disegno N. - Dwg. No.		ID10467	
> 400 - 1000	± 2.0	ISOLEX							

3	Material Insert	Brass
2	Insert	1(M20) 3(M16 + M10*2)
ITEM No.	DESCRIPTION	MATERIALS QTY REMARK