


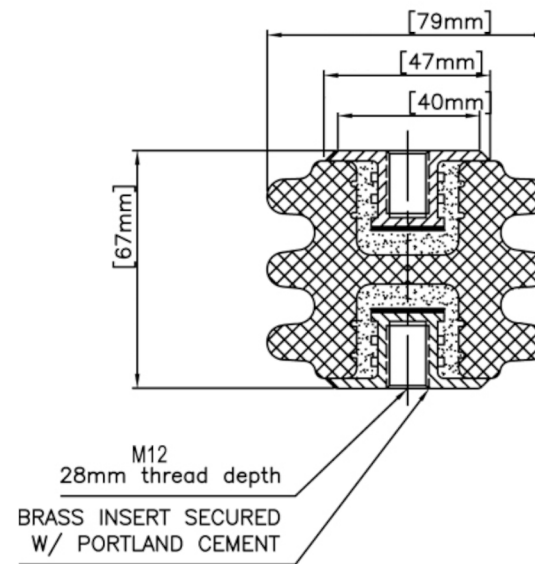

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE	
APPLICABLE STANDARD: ANSI C29.10-1989	
Cantilever strenght	2.35 kN
Tensile strength	8 kN
Compression strenght	44.5 kN
Nema. voltage rating	5 kN
Minimum creepage distance	102 mm
Impulse withstand	60 kV
GLAZE: ANSI 70 LIGHT GREY	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code 70150
Conferma Acknowledg.		File	Revisione Revision - A4
ISOLEX Milano Italy		Descrizione - Description Ceramic post insulator	
		Foglio Sheet 1 di 1	
		Disegno N. - Dwg. No. ID10345	