

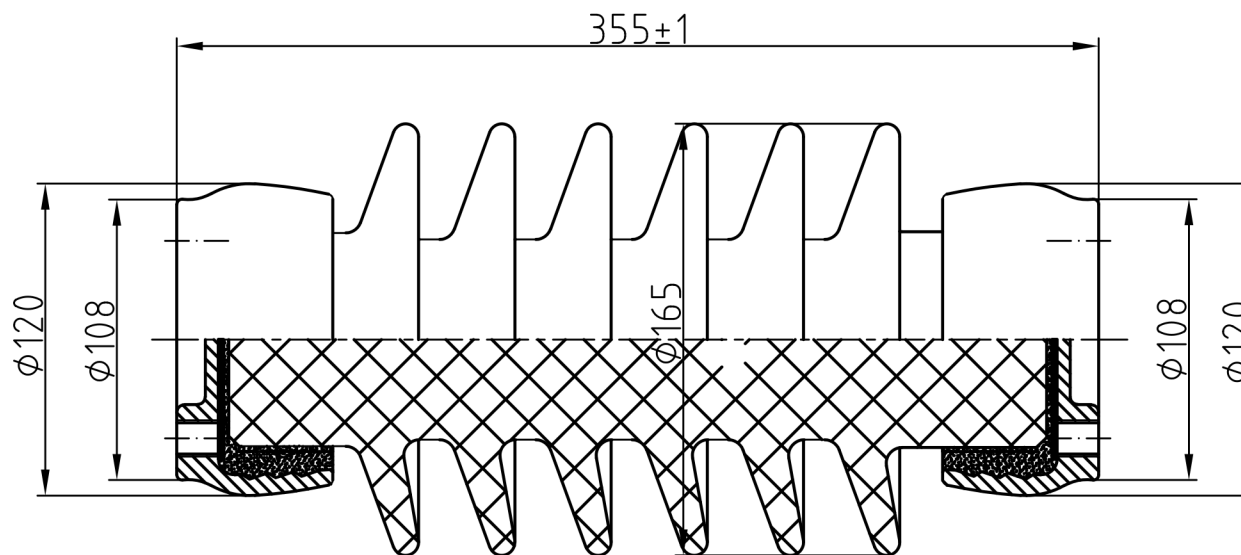


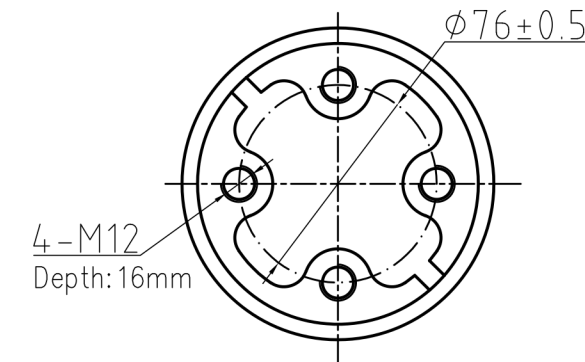

Top installation holes

Bottom installation holes

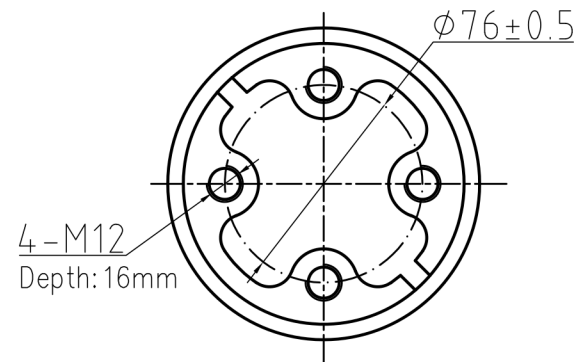

TECHNICAL REQUIREMENTS:

Impulse Withstand Voltage	kV	150
Wet p.f. Withstand Voltage	kV	50

PHYSICAL PROPERTIES		
Min. Creepage Distance	mm	600
Net Weight	kg	12
Colour		Grey

Torsion Strength	kN·m	1.5
Cantilever Strength	kN	8
Reference Standard:	IEC60168	IEC60273

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale	Codice Code
Conferma Acknowledg.		File	Revisione Revision
		1:1	C8-150-600
		ID10307	0
Descrizione - Description		Foglio Sheet	
C8-150-600		1 di 1	
		Disegno N. - Dwg. No.	
		ID10307	