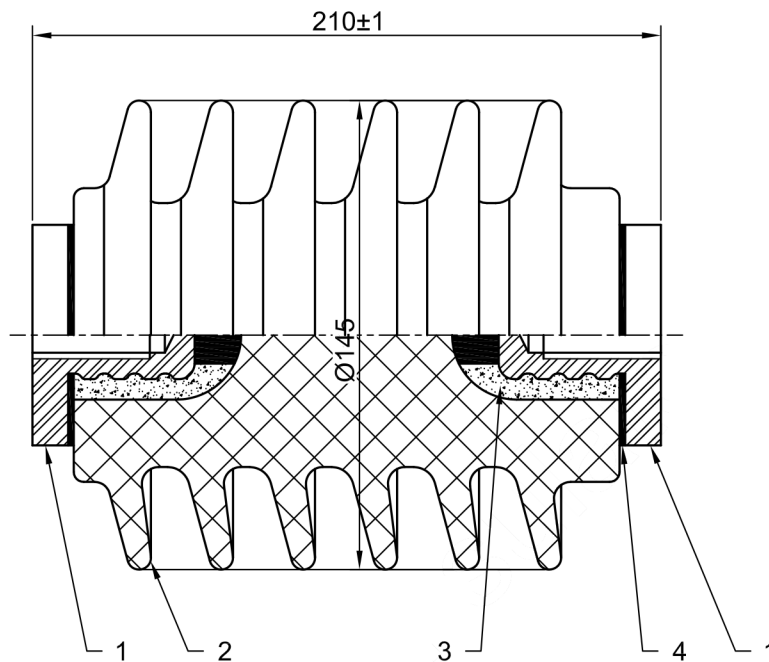


Top & Bottom View

TECHNICAL SPECIFICATIONS

- | | |
|---|-------|
| 1.Min.creepage distance | 440mm |
| 2.Cantilever failing load | 4kN |
| 3.Lightning impulse withstand voltage | 125kV |
| 4.Power frequency withstand voltage wet | 50kV |
| 5.Applicable Standard:IEC 60168 & IEC 60273 | |

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code HP303251
Conferma Acknowledg.		File	Revisione Revision 0 di A4
		Descrizione - Description	
		G210	
		Foglio Sheet 1 di 1	
		Disegno N. - Dwg. No. ID10316	