
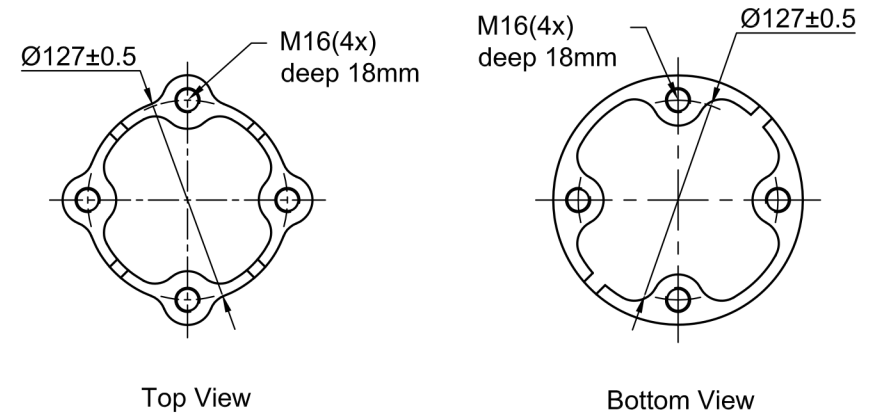


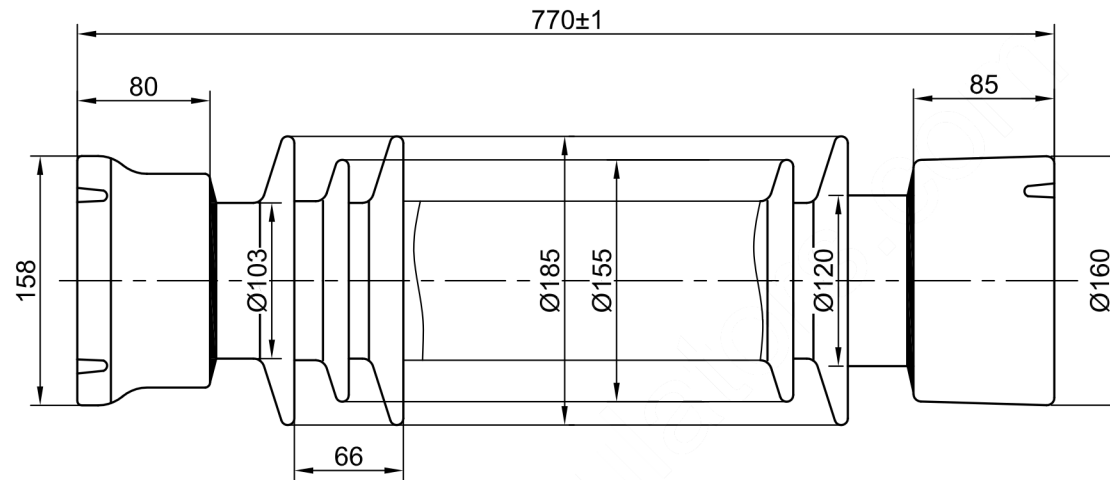

ELECTRICAL PROPERTIES

1.Max.operating voltage	69kV
2.Lightning Impulse Withstand Voltage	325kV
3.Power Frequency Withstand Voltage (wet)	140kV

PHYSICAL PROPERTIES

1.Min. Creepage Distance	1300mm
2.Arcing Distance	600mm
3.Portland cement	52.5
4.Material of fitting	Galv.ductile iron

MECHANICAL PROPERTIES

1.Bending Strength	10kN
2.Torsional Strength	4kN.m

According to Standard: IEC 60168 & IEC 60273

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale	Codice Code
Conferma Acknowledg.		File	Revisione Revision
		C10-325-1300	
		Foglio Sheet	
		1 di 1	
		Disegno N. - Dwg. No.	
		ID10320	