



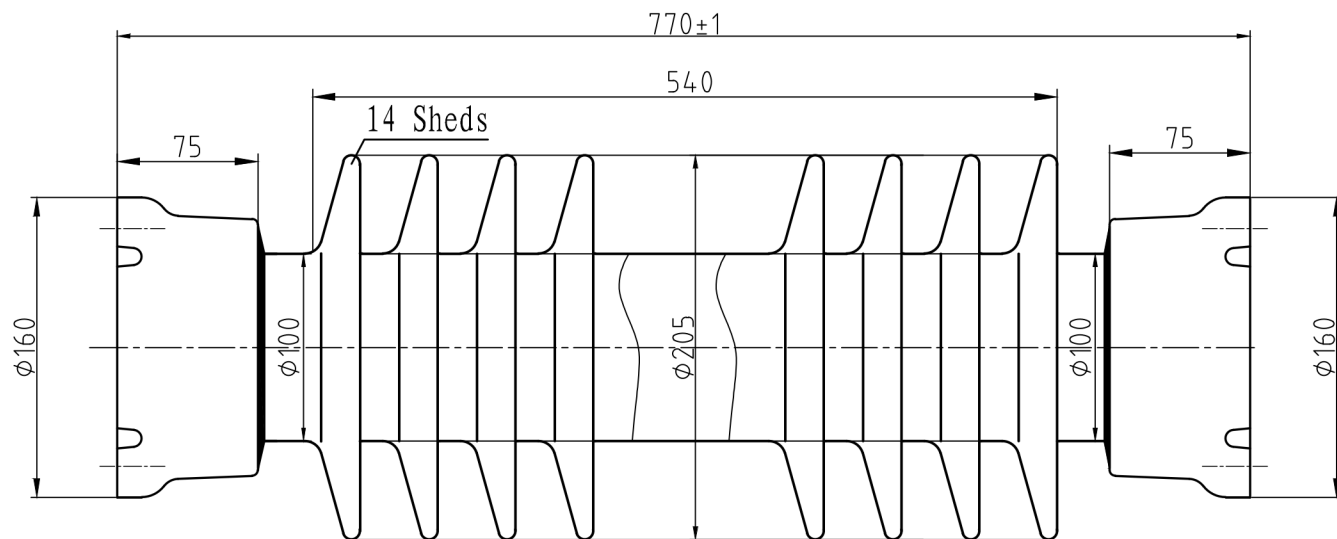

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
BIL/BIL	kV	325
Dielectric Withstand voltage (wet)	kV	140
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Creepage distance /Linea di Fuga	mm	1813
Net weight/Peso netto	kg	35
Colour/Colore	Brown/Marrone	
Material	Porcelain C130	
Hot Dip Glavanized Iron metal parts		
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Cantilever/Flessione	kN	6
Torsional strenght/Coppia massima Torsione	kN/m	3
Applicable standard /Standard applicabili	IEC 60168& IEC 60273	

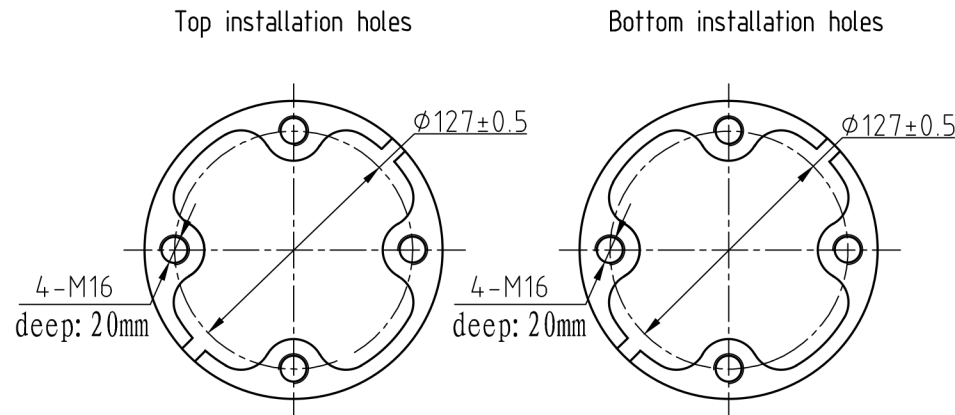

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code C6-325-1813-127
Conferma Acknowledg.		File	Revisione Revision - A4
Descrizione - Description C6 325-1813 A			Foglio Sheet 1 di 1
ISOLEX Milano Italy			Disegno N. - Dwg. No. ID10331