

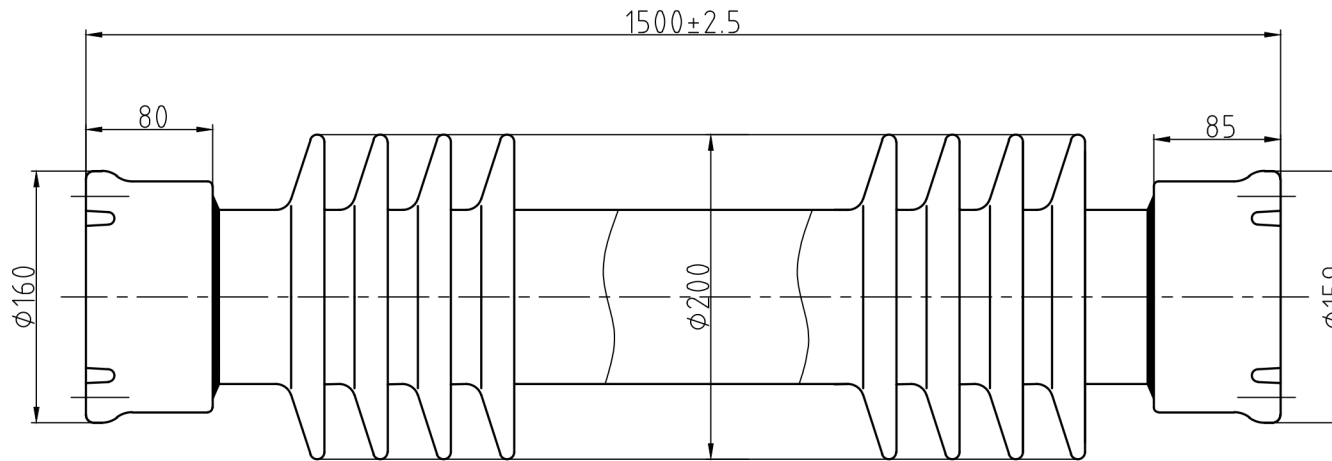


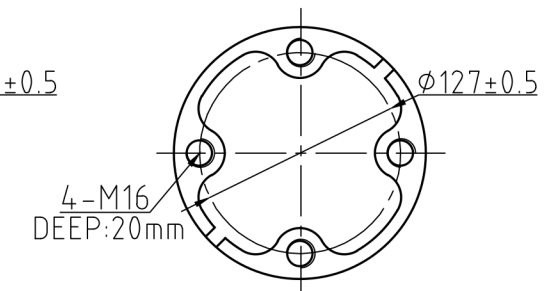

Top installation holes

Bottom installation holes

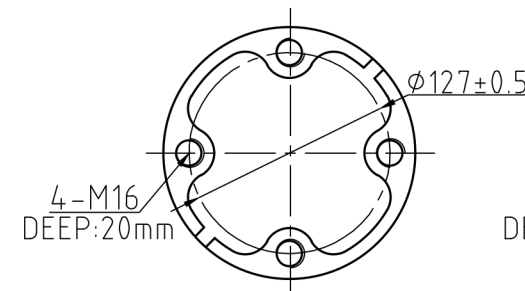

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
BIL/BIL	kV	650
Dielectric Withstand voltage (wet)	kV	275
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Creepage distance/Linea di Fuga	mm	3625
Net weight/Peso netto	kg	69
Colour/Colore	Brown/Marrone	
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Cantilever/Flessione	kN	6
Torsional strenght/Coppia massima Torsione	kN/m	3
Applicable standard /Standard applicabili	IEC 60168& IEC 60273	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana		Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code C6-650-3625-127
Conferma Acknowledg.	File	Revisione Revision -	A4
ISOLEX Milano Italy		Descrizione - Description Ceramic post insulator	
		Foglio Sheet 1 di of 1 Disegno N. - Dwg. No. ID10335	