


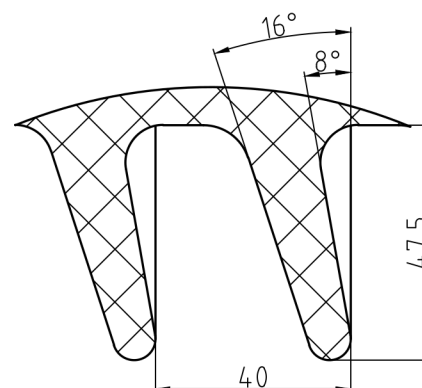


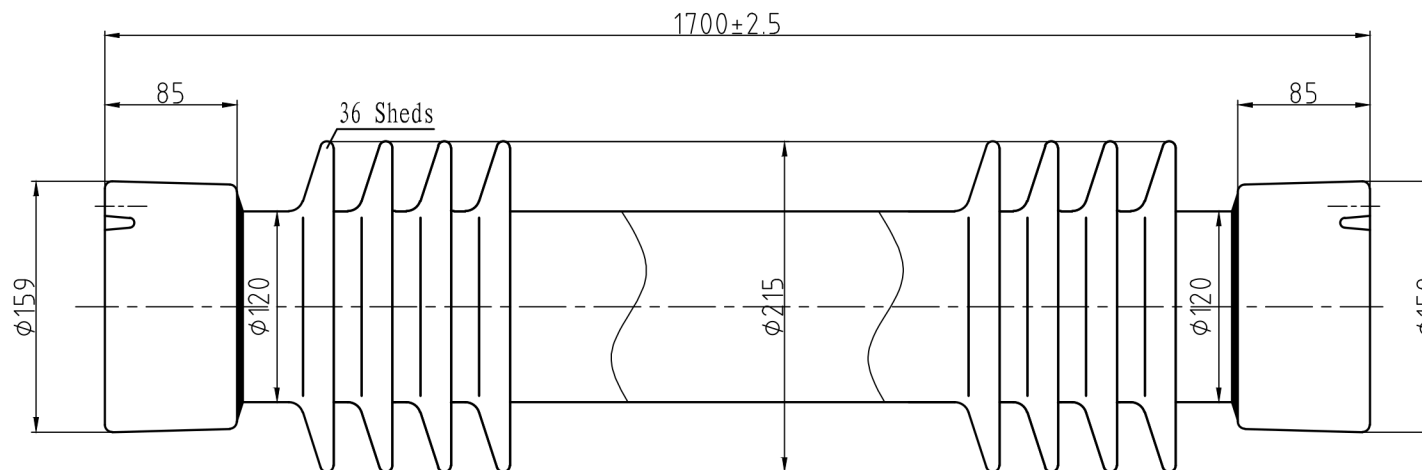

Top installation holes

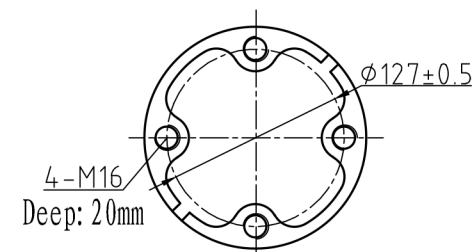

Bottom installation holes

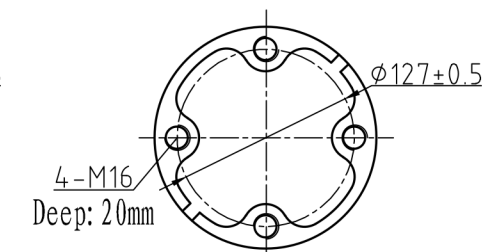

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE

ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE

BIL/BIL	kV	750
Dielectric Withstand voltage (wet)	kV	325

PHYSICAL PROPERTIES/PROPRIETA FISICHE

Creepage distance /Linea di Fuga	mm	4250
Net weight/Peso netto	kg	91
Colour/Colore	Brown/Marrone	
Material	Porcelain C130	

MECHANICAL PROPERTIES/PROPRIETA MECCANICHE

Cantilever/Flessione	kN	6
Torsional strenght/Coppia massima Torsione	kN/m	3

Applicable standard /Standard applicabili	IEC 60168& IEC 60273	
---	----------------------	--

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana
 Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse

Disegno di proprieta della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX

Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code C6-750-4250
Conferma Acknowledg.	Descrizione - Description	File	Revisione Revision - A4
ISOLEX Milano Italy		C6-750-4250	
		Foglio Sheet 1 di 1	
		Disegno N. - Dwg. No. ID10336	