


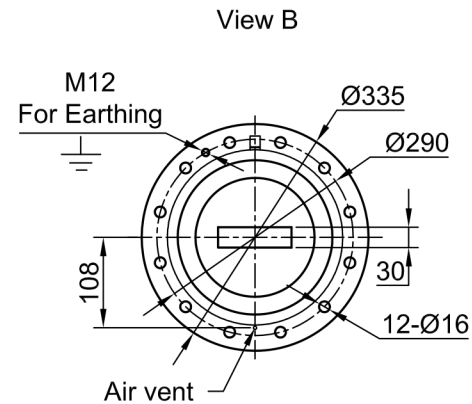


Description		
1	Top Terminal	Cu Silver plated min 10 μ m
2	Porcelain Insulator	
3	Test Tap	
4	Flange	Aluminium Alloy
5	Bottom Terminal	Cu Silver plated min 10 μ m

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
Rated Voltage	kV	24
Rated Frequency	Hz	50
Rated Current	A	7500
1min power–frequency withstand voltage	kV	55
Partial discharge level at 24kV	<10pC	
Tand of bushings	<0.5%	
Lightning impulse withstand voltage (dry)	kV	125
Rated thermal short–time current 2sec	kA	100
Material of conductor	Cu	
Test Tap voltage withstand level	kVrms	2
Creepage distance	mm	828
Installation angle	0–90°	
Altitude above mean sea level	<1000m	
Test cantilever load	N	3150
Type of conductor	Bottom connection	
Ambient Temperature	–20°C to +42°C	
Internal Insulation	RIP	
External insulation/Colour	Porcelain/Brown	
Comply with standard: IEC 60137		

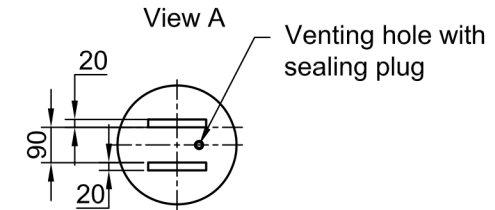

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Media ☐ Grossolana ☐ Molto grossolana	
Quote (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX	
Cliente Customer	Scala Scale 1:1
Conferma Acknowledg.	Codice Code HP307171
N. Ordine P. Order	Revisione Revision -
File	A4
Descrizione - Description BP24-100K	
Foglio Sheet 1 di 1	
Disegno N. - Dwg. No. ID10372	

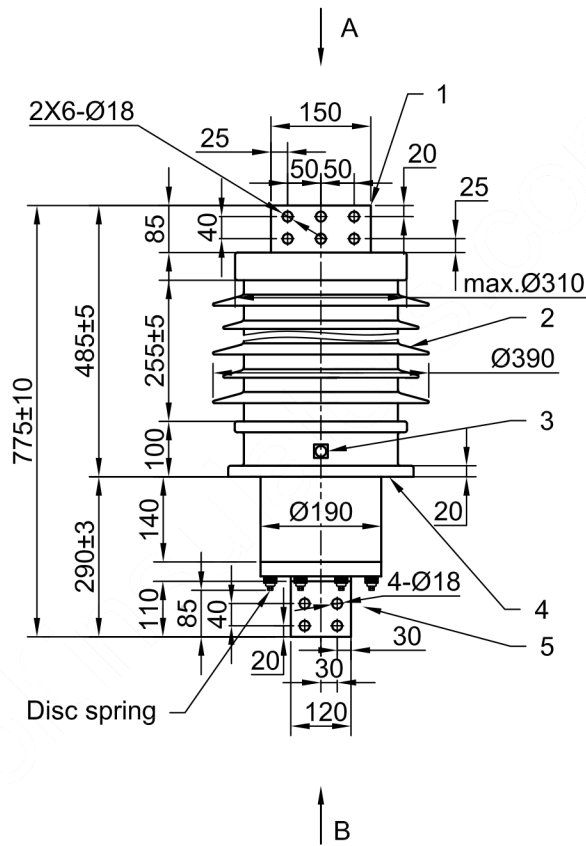