


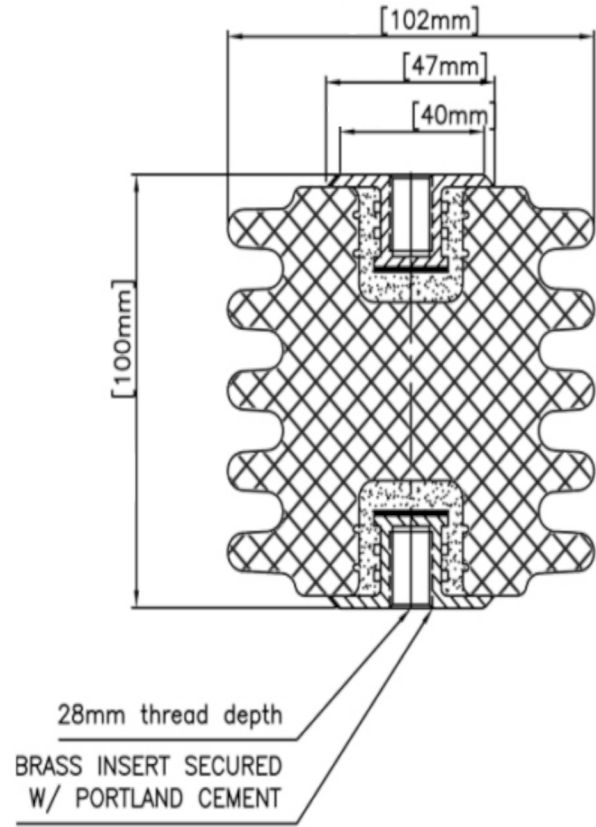

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE	
APPLICABLE STANDARD: ANSI C29.10-1989	
Cantilever strenght	3.35 kN
Tensile strength	10.5 kN
Compression strenght	89.5 kN
Nema. voltage rating	8.7 kV
Minimum creepage distance	194 mm
Impulse withstand voltage (BIL)	75 kV
Material	C120
GLAZE: ANSI 70 LIGHT GREY	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana		Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX			
Cliente Customer	N. Ordine P. Order	Scala Scale 1:1	Codice Code
Conferma Acknowledg.		File	Revisione Revision - A4
ISOLEX Milano Italy		Descrizione - Description G100	
		Foglio Sheet 1 di 1 Disegno N. - Dwg. No. ID10386	