




TECHNICAL REQUIREMENTS / CARATTERISTICHE TECNICHE		
Glazed colour: brown		
Inserts: hot dip galvanized steel		
Reference Standard	IEC60168	
Creepage distance	720	mm
Cantilever strenght	4	kN
Lighting Impulse Withstand Voltage Dry	170	kV
Power Frequency Withstand Voltage Wet	70	kV

MODIFICHE	
0	I.C.0001 15-12-25 AT

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana	
Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse	
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX	
Cliente Customer	Scala Scale 1:1
Conferma Acknowledg.	Codice Code
N. Ordine P. Order	File
Descrizione - Description	
G300	
Revisione Revision	
Foglio Sheet 1	di of 1
Disegno N. - Dwg. No. ID10454	

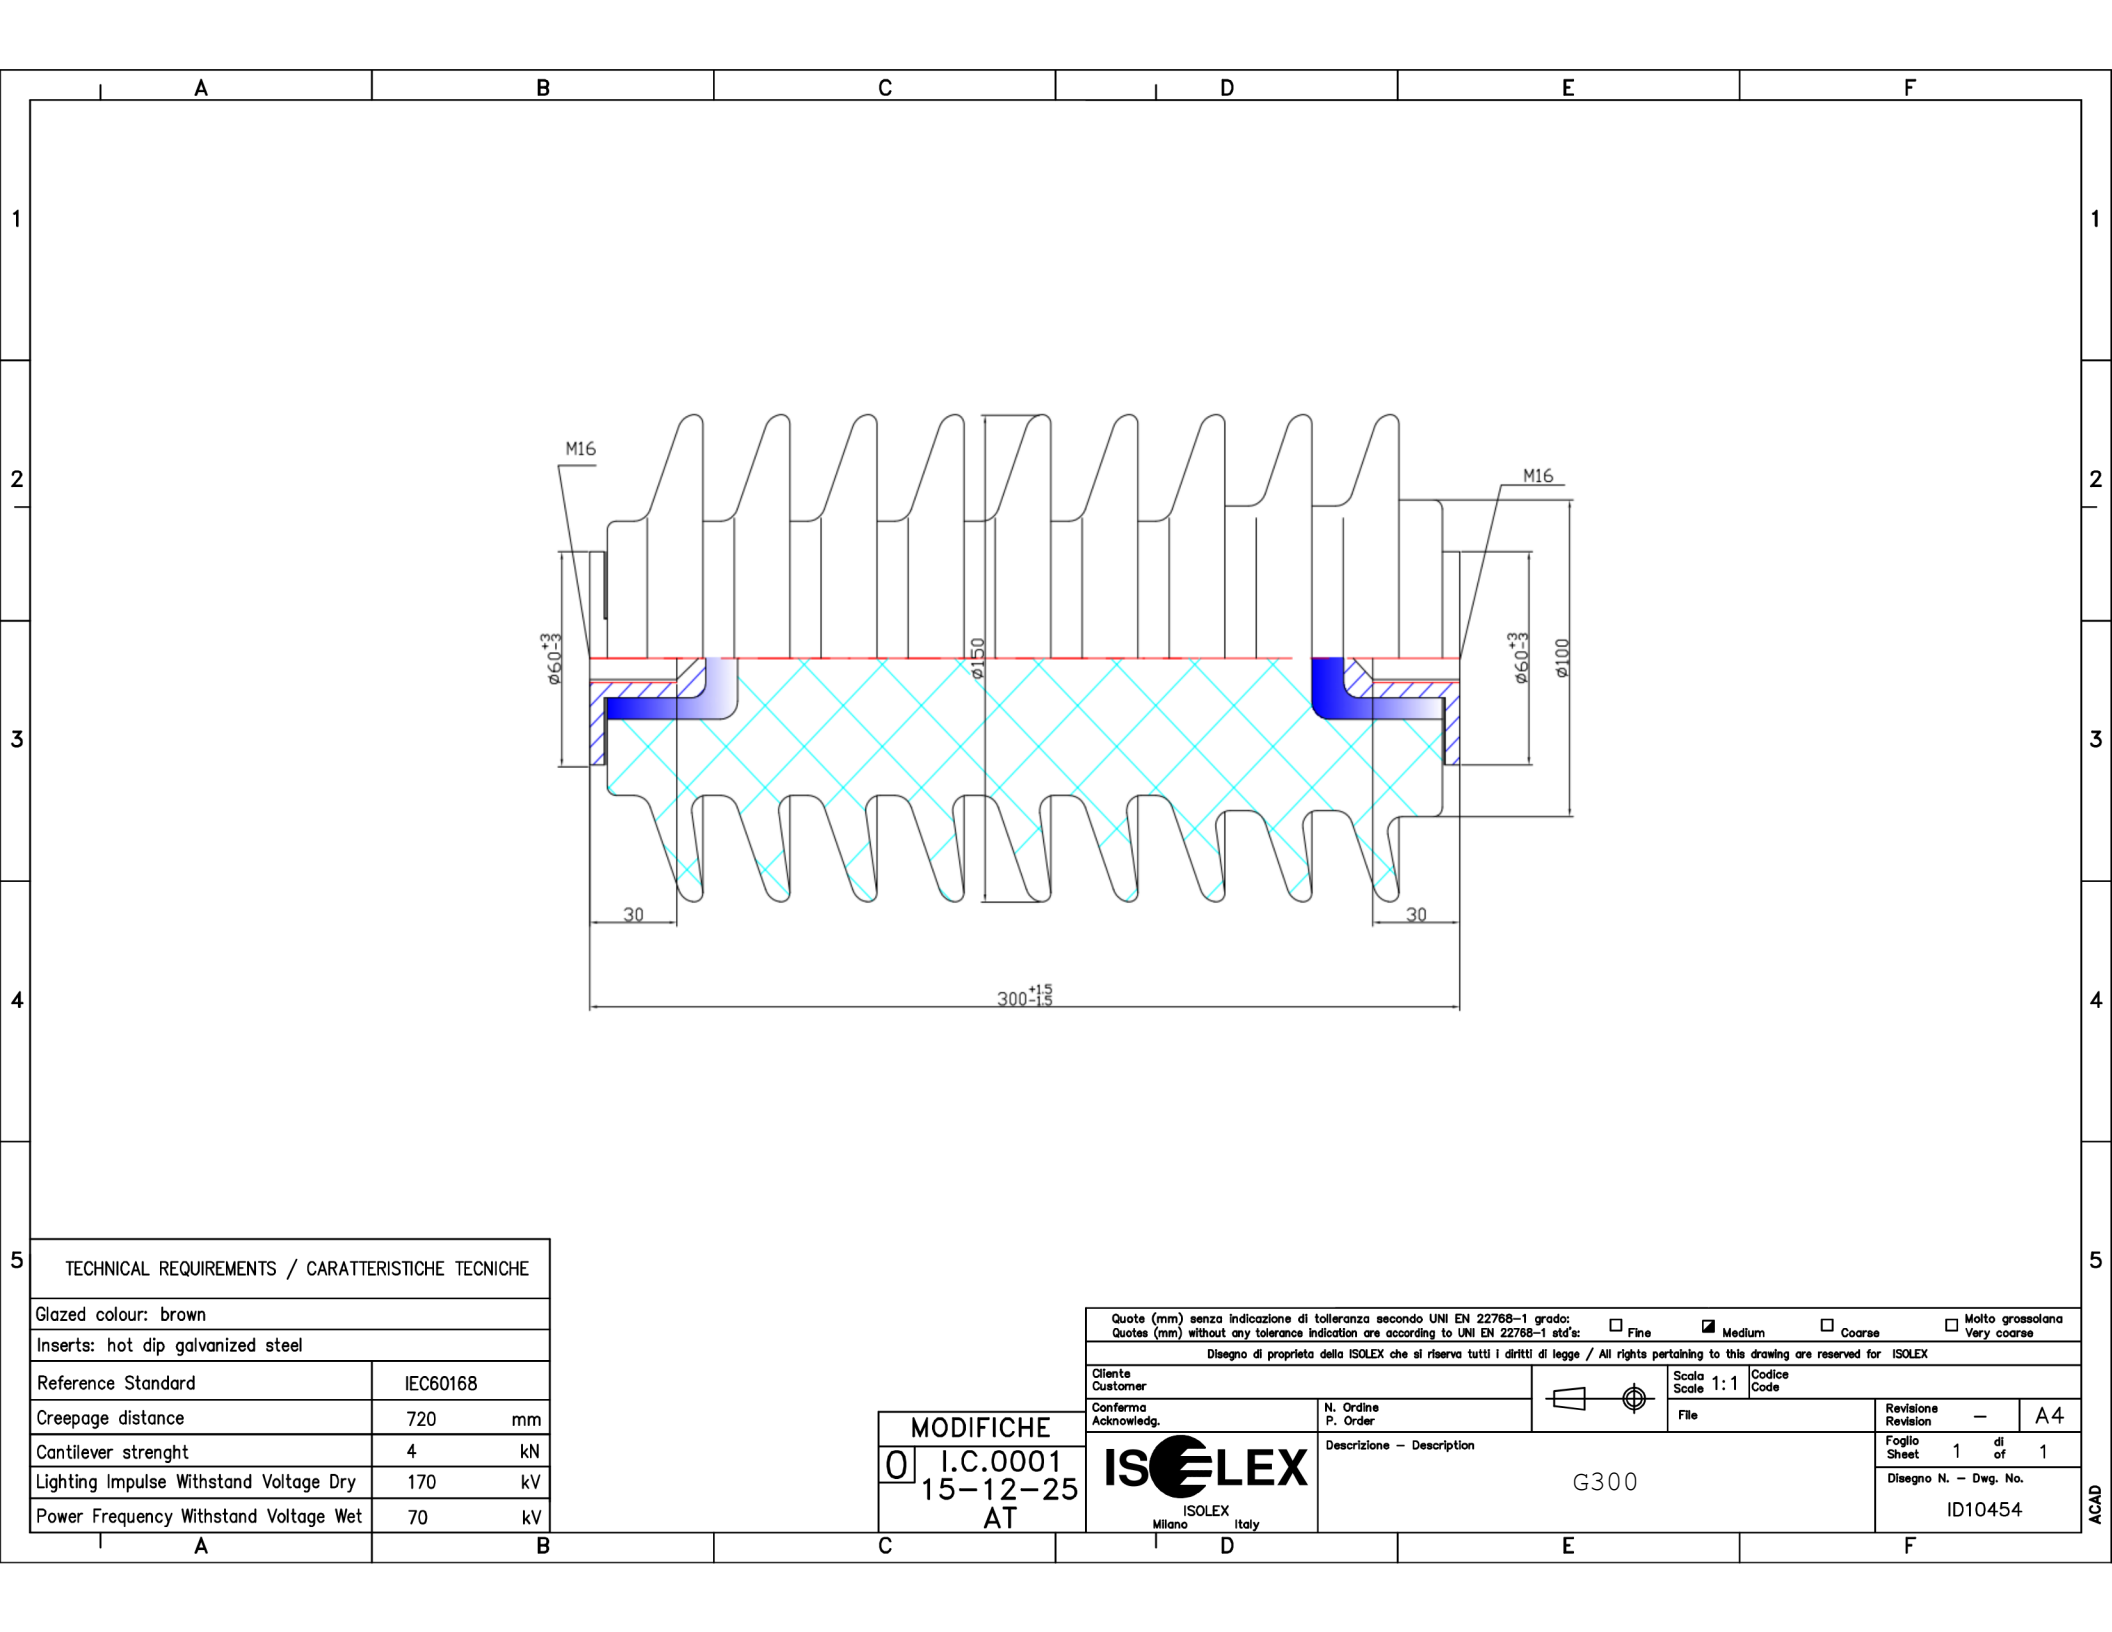