
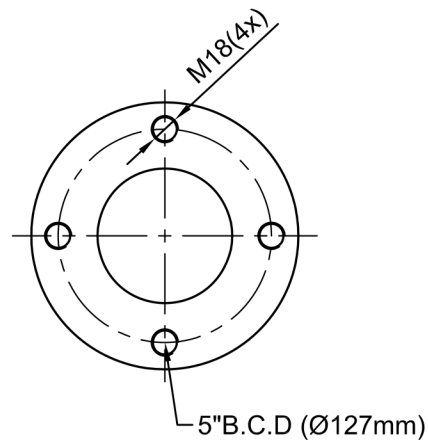


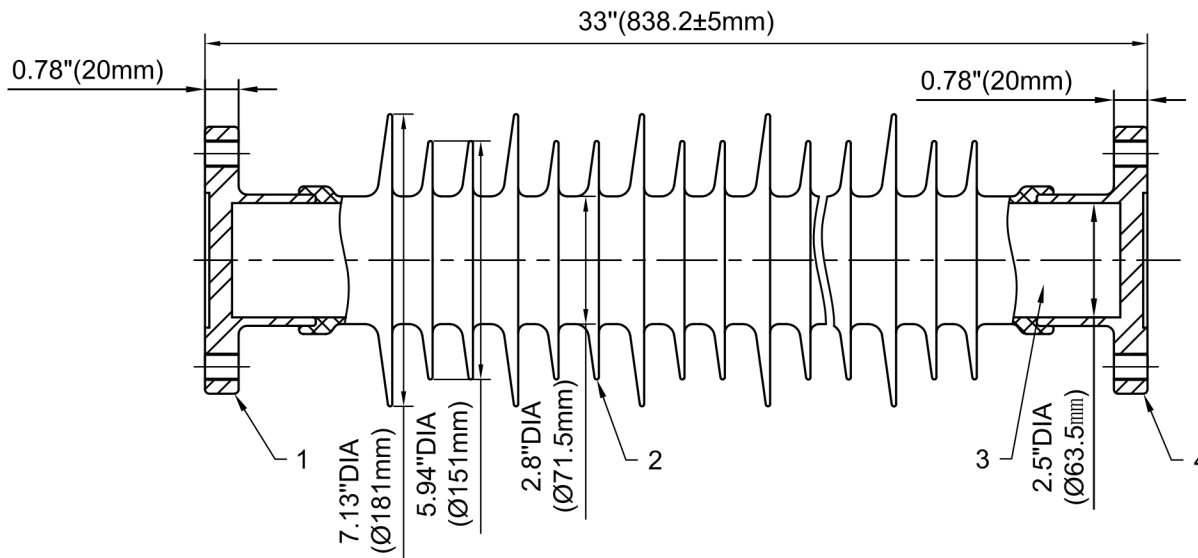


Top & Bottom View

Weather sheds	Silicone rubber	QTY: 1
Core rod	Glass fiber reinforced epoxy resin	QTY: 1
Flange	Galvanized Steel	QTY: 2
Material	Silicone rubber	
Weight	17.6 kg	
Color	Grey	

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
Rated Voltage	kV	72.5
Power Frequency Withstand Voltage (Wet)	kV	140
Dry Lightning Impulse Withstand Voltage	kV	325
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Min. Arcing Distance	mm	730
Min. Creepage Distance	mm	2200
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Specified Cantilever Load (SCL)	kN	10
Specified Mechanical Tensile Load (SML)	kN	71.2
Specified Torsion Load (SToL)	kNm	3.39
Specified Compression Load (SCoL)	kNm	111.2
Applicable standard / Standard applicabili IEC 62231 IEC 60273		

Rev.	Disegnato Drawn	Approvato Approved	Data Date	Descrizione Description
01	-	-	-/-/-	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana												
Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse												
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX												
N. Ordine P. Order	Data Date	Disegnato Drawn	AT	Data Date	14/02/26	Scala Scale			1:1 			
Cliente Customer	Data Date	Approvato Approved	RIZZI	Data Date	14/02/26	Revisione Revision	1	2	3	4	5	6
Conferma Acknowledg.	—		Controllato Checked	File Disk	ID10488	Codice Code	TABLE				A4	
 ISOLEX Milano Italy Descrizione - Description SI-325-10						Foglio Sheet		1	di of		1	
						Disegno N. - Dwg. No.					ID10488	