

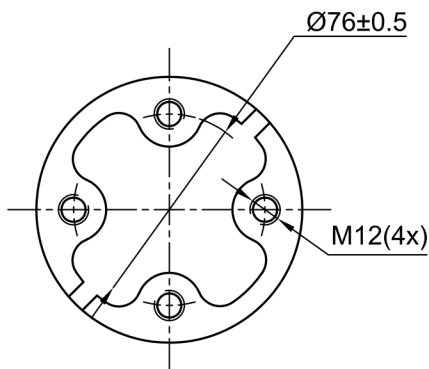


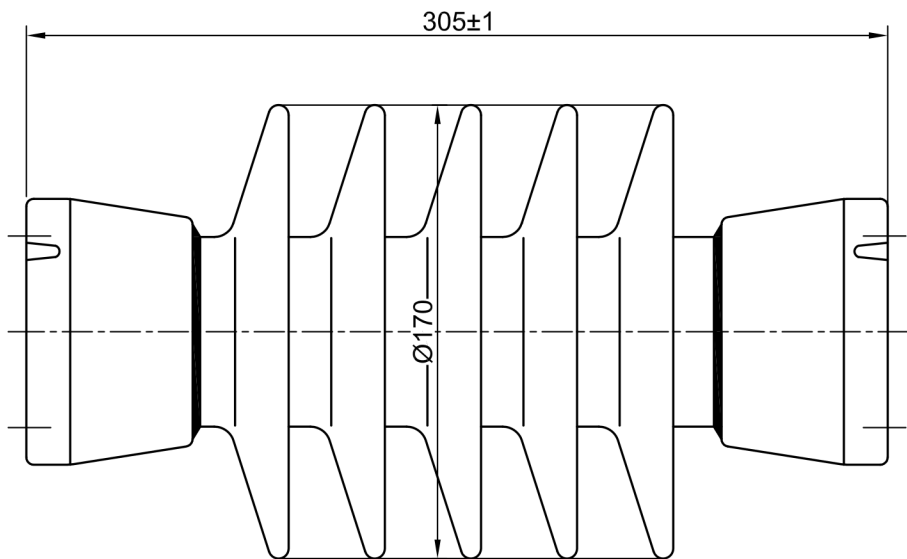

Top & Bottom View



Sheds

1	Material	Porcelain
ITEM No.	DESCRIPTION	MATERIALS QTY REMARK

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
Lighting Impulse Withstand Voltage	kV	125
Power Frequency Withstand voltage (wet)	kV	50
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Creepage distance min.	mm	600
Color	Brown	
Metallic Material	Galv.cast Iron	
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Cantilever Strengh	kN	4
Torsion strenght	kN/m	0.8
Applicable standard	IEC 60168 & IEC 60273	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana Very coarse									
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX									
N. Ordine P. Order	Data Date	Disegnato Drawn	AT	Data Date	08/07/24	Scala Scale		1:1	
Cliente Customer	Data Date	Approvato Approved	RIZZI	Data Date	08/07/24	Revisione Revision	1	2	3
Conferma Acknowledg.	—	Controllato Checked		File Disk	ID10494	Codice Code	TABLE		A4
Descrizione — Description						Foglio Sheet		1	di of
ISOLEX Milano Italy						C4-125-600 A		Disegno N. — Dwg. No.	
								ID10494	

01	—	—	— / — / —	
Rev.	Disegnato Drawn	Approvato Approved	Data Date	Descrizione Description