


HP058470.3

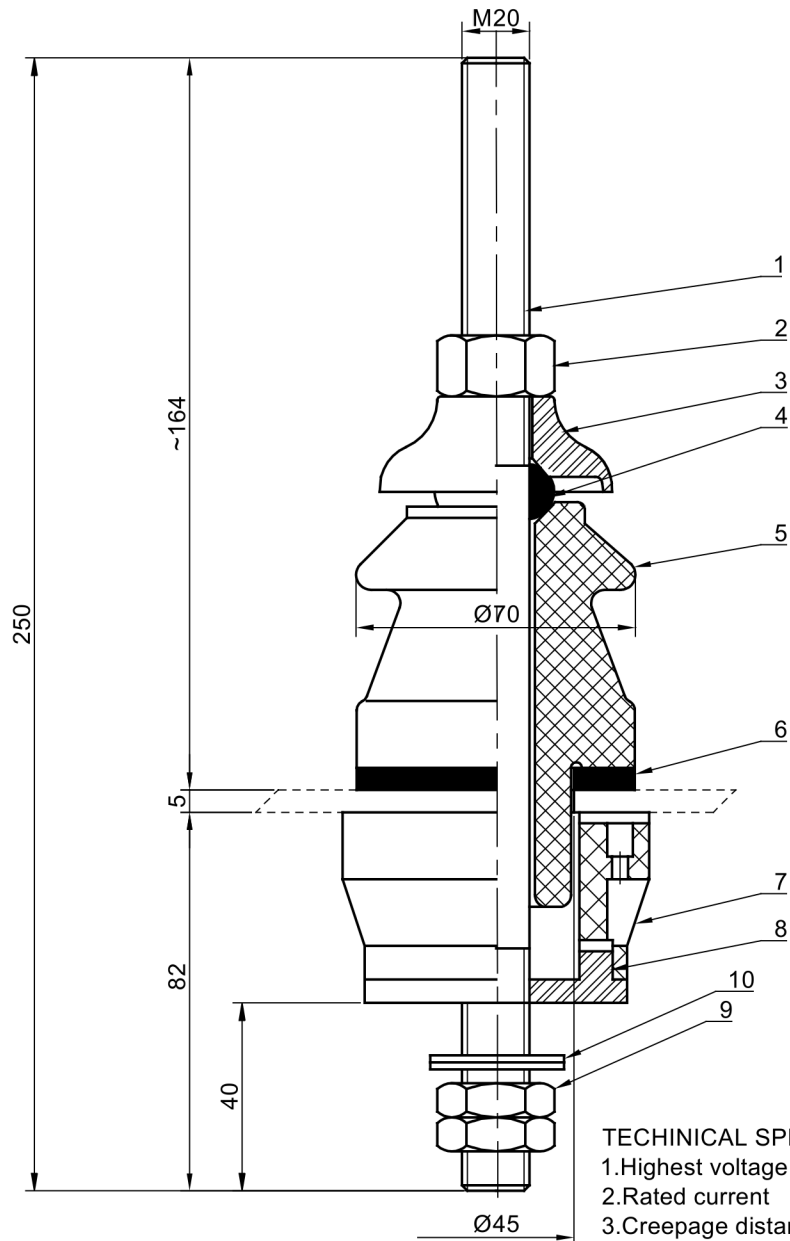

TECHINICAL SPECIFICATION

1.Highest voltage rating	1.2kV
2.Rated current	630A
3.Creepage distance	70mm
4.BIL rating	20kV
5.Cantilever load	1000N
6.Power frequency withstand voltage (wet/dry)	10kV/10kV

10	Washer	Brass	2	5	Top insulation body	Porcelain	1	
9	Lock nut	Brass	2	4	Ring gasket	NBR	1	
8	Base	Brass	1	3	Cover	Brass	1	
7	Bottom insulation body	Nylon	1	2	Nut	Brass	1	
6	Flange gasket	NBR	1	1	Conductor rod	Brass	1	
NO	DESCRIPTION	MATERIALS	QTY	NO	DESCRIPTION	MATERIALS	QTY	
Material	Weight		 ISOLEX Milano Italy			Drawing No. ID10505		
Porcelain	2.2kg							
	Date					Name		
Drawn	2021-06-01							
Checked								
Approved					Title 1KV630 EN50386			

ISOLEX

ISOLEX
Milano Italy

1KV630 EN50386