


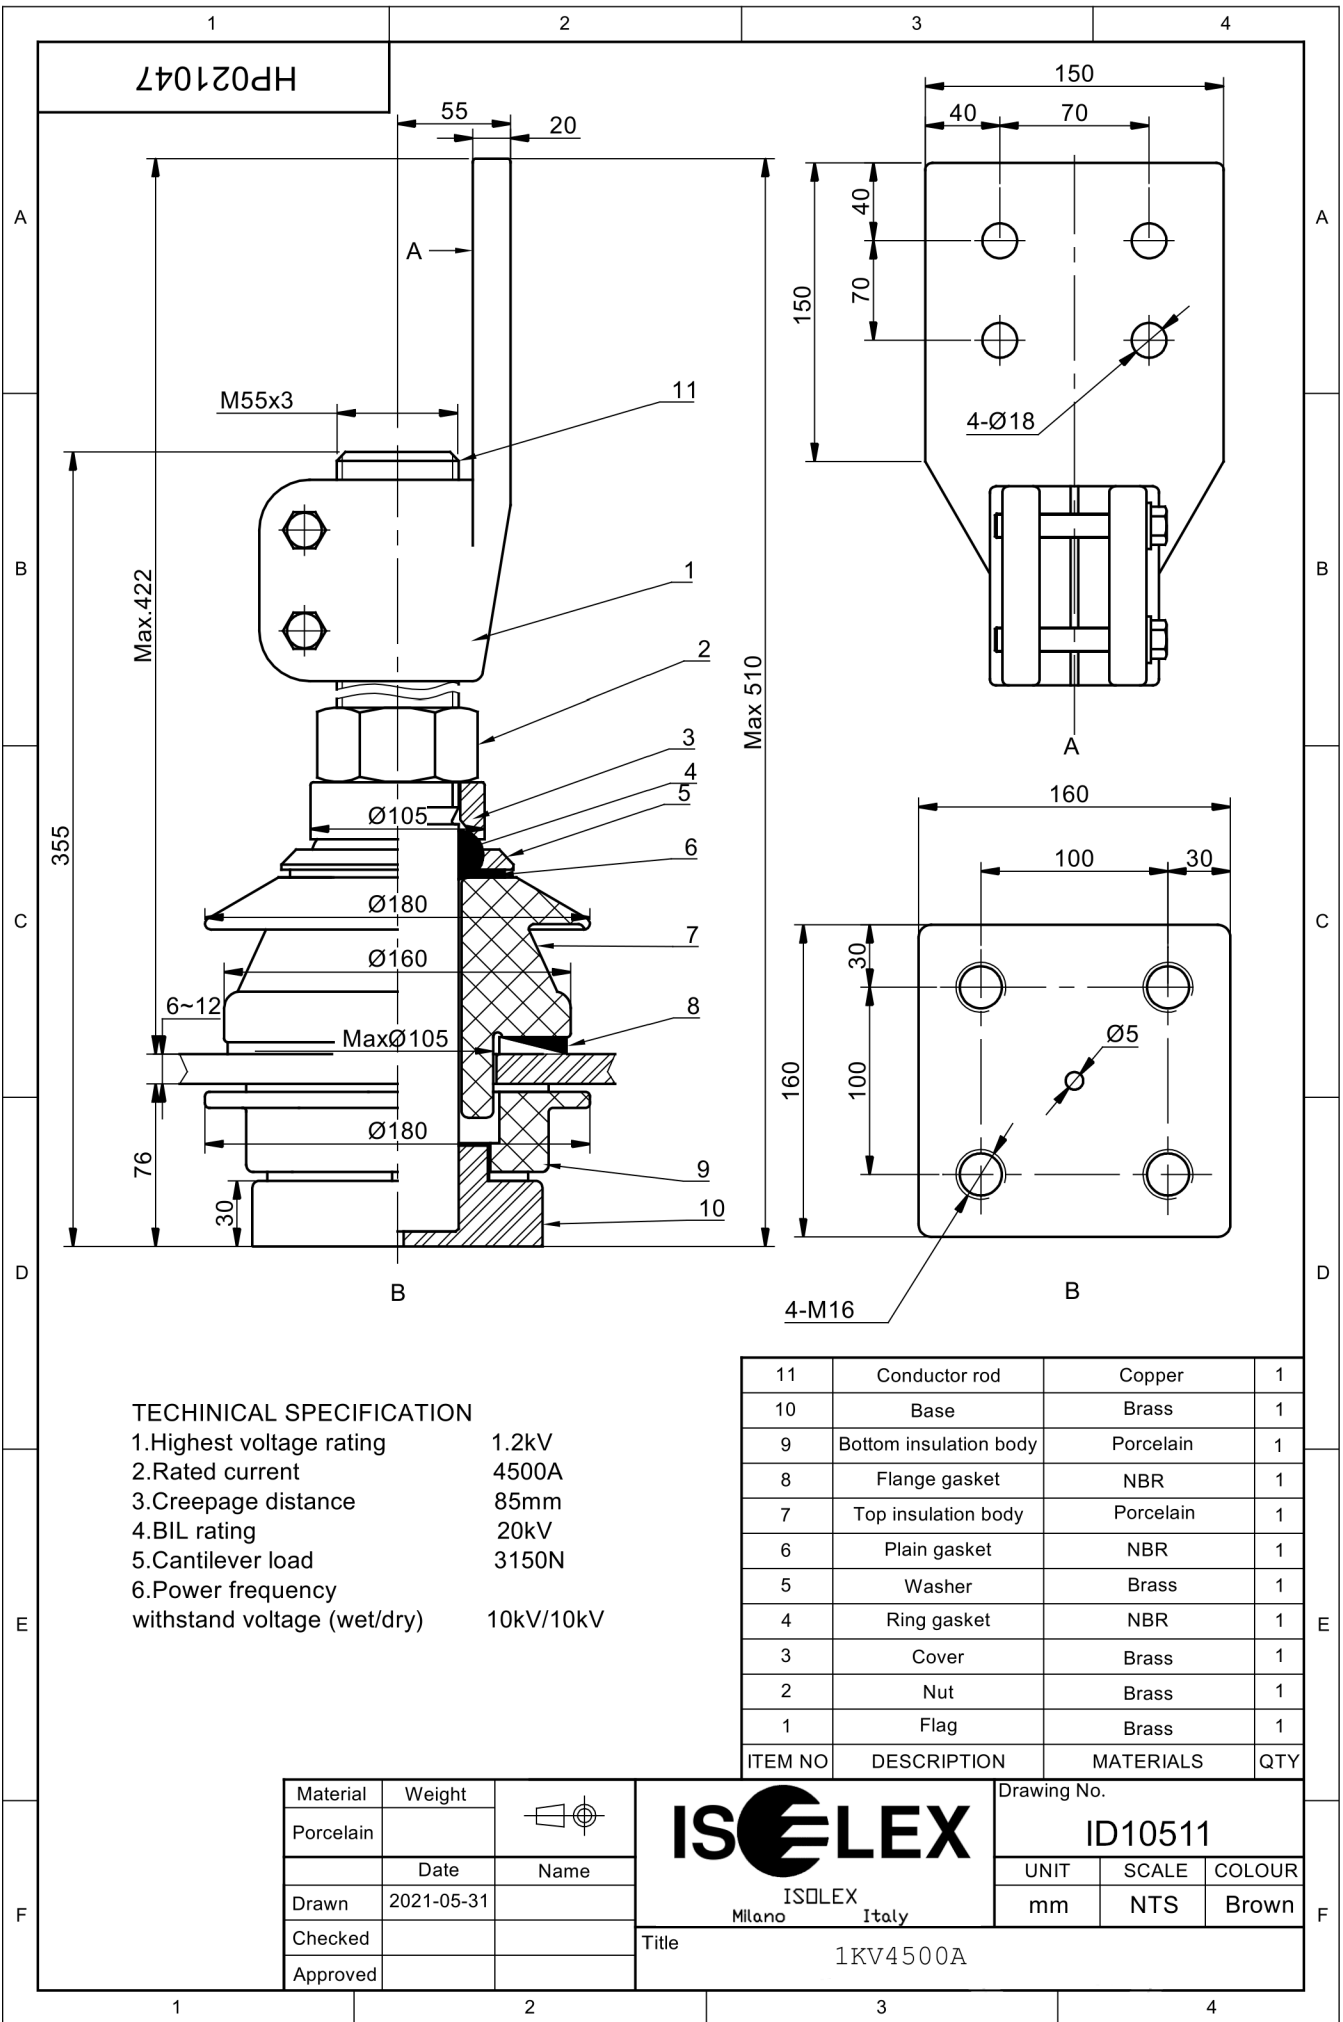

TECHINICAL SPECIFICATION

1.Highest voltage rating	1.2kV
2.Rated current	4500A
3.Creepage distance	85mm
4.BIL rating	20kV
5.Cantilever load	3150N
6.Power frequency withstand voltage (wet/dry)	10kV/10kV

11	Conductor rod	Copper	1
10	Base	Brass	1
9	Bottom insulation body	Porcelain	1
8	Flange gasket	NBR	1
7	Top insulation body	Porcelain	1
6	Plain gasket	NBR	1
5	Washer	Brass	1
4	Ring gasket	NBR	1
3	Cover	Brass	1
2	Nut	Brass	1
1	Flag	Brass	1
ITEM NO	DESCRIPTION	MATERIALS	QTY

Material	Weight	
Porcelain		
	Date	Name
Drawn	2021-05-31	
Checked		
Approved		

ISOLEX
Milano Italy

Drawing No.

ID10511

UNIT	SCALE	COLOUR
mm	NTS	Brown

Title

1kV4500A