
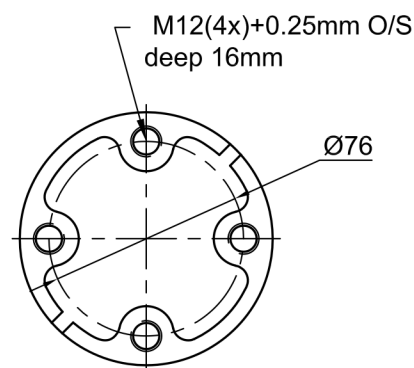


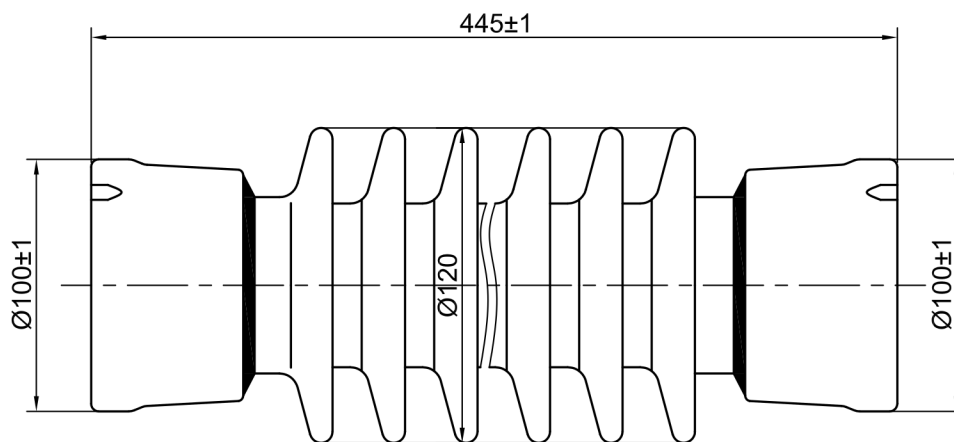


Top & bottom view

2	Material	Porcelain
1	Color	Brown
ITEM No.	DESCRIPTION	MATERIALS

TECHNICAL REQUIREMENTS /CARATTERISTICHE TECNICHE		
ELECTRICAL PROPERTIES/PROPRIETA ELETTRICHE		
Impulse Withstand Voltage (BIL)	kV	170
Power Frequency Withstand voltage (wet)	kV	70
PHYSICAL PROPERTIES/PROPRIETA FISICHE		
Creepage distance min.	mm	720
Dry Arching distance	mm	340
Metallic Materials	Galvan ductile iron	
MECHANICAL PROPERTIES/PROPRIETA MECCANICHE		
Cantilever strenght	kN	4
Torsional strenght	kN.m	1.2
Applicable standard /Standard applicabili IEC 60168 & IEC 60273		

Rev.	Disegnato Drawn	Approvato Approved	Data Date	Descrizione Description
01	—	—	--/--	

Quote (mm) senza indicazione di tolleranza secondo UNI EN 22768-1 grado: ☐ Fine ☒ Medium ☐ Coarse ☐ Molto grossolana											
Quotes (mm) without any tolerance indication are according to UNI EN 22768-1 std's: ☐ Fine ☒ Medium ☐ Coarse ☐ Very coarse											
Disegno di proprietà della ISOLEX che si riserva tutti i diritti di legge / All rights pertaining to this drawing are reserved for ISOLEX											
N. Ordine P. Order		Data Date		Disegnato Drawn		Data Date		Scala Scale			
				AT		24/02/25		1:1			
Cliente Customer		Data Date		Approvato Approved		Data Date		Revisione Revision		1 2 3 4 5 6	
				RIZZI		24/02/25		1		2 3 4 5 6	
Conferma Acknowledg.		—		Controllato Checked		File Disk		ID10482		Codice Code	
								TABLE		A4	
 ISOLEX Milano Italy		Descrizione — Description								Foglio Sheet	
		Station Post insulator C4-170-720								1	
										di of	
								Disegno N. — Dwg. No.		ID10515	